

THE PROPOSED HIGH RISE GROUP DEVELOPMENT WITH EXTENDED COMBINED DOUBLE BASEMENT FLOOR (BLOCK: 1 - 4 & CLUB HOUSE) CONSISTING OF BLOCK 1: GROUND FLOOR + 22 FLOORS (252 DWELLING UNIT), BLOCK 2: GROUND FLOOR + 22 FLOORS (343 DWELLING UNIT), BLOCK 3: GROUND FLOOR + 22 FLOORS (252 DWELLING UNIT), BLOCK 4: GROUND FLOOR + 22 FLOORS (252 DWELLING UNIT), AND BLOCK 5: CLUB HOUSE : GROUND FLOOR + 2 FLOORS AND OPEN SWIMMING POOL (TOTALLY 1099 DWELLING UNITS) AT CHENNAI OUTER RING ROAD, PAZHANTHANDALAM VILLAGE, IN S.NO.182/1A, 1B, 2, 195/2A1, 2A2, 2B1, 2B2, 196/1, 2, 3, 197/1, 2, 3, 4, 198/1, 2, 3, 199, 200/3A1, 4, 202/5, 6, 203/1, 2, 3, 204/1A, 1B, 3, 205/2A, 214/2A, 215/1A, 2A, 216/1, 1B, 2, 217/1, 218/1, 2A, 2B, 219/1A, 1B, 1C, 2A1, 2A2, 2B1, 2B2, 3A, 3B, 4B, 221/1A, 2A1, 2B1, 222/1A, 387/2A, 2B, 389/1, 2, 390/1, 2, 400/1B, 2B, 3A1B, 401/1A, 402/1A, 1B, 2, 403/1, 2, 404/1A, 1B, 2, 405/1B, 2A, 2B AND 409/2 OF PAZHANTHANDALAM VILLAGE, KUNDRATHUR TALUK, KANCHEEPURAM DISTRICT, WITHIN THE LIMITS OF KUNDRATHUR PANCHAYAT UNION.

STRUCTURAL DESIGN BASIS REPORT

M/s. UNIVERSAL CONSULTANTS
2/4, First Cross Street, Indira Nagar
Adyar, Chennai - 20



Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer

Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/SE/Gr-I/2024/07/005

PROJECT BRIEF

This report sets out the basic parameters used for the proposed High Rise Group Development with Extended Combined Double Basement floor (Block: 1 - 4 & Club House) Consisting of Block 1: Ground Floor + 22 Floors (252 Dwelling Unit), Block 2: Ground Floor + 22 Floors (343 Dwelling Unit), Block 3: Ground Floor + 22 Floors (252 Dwelling Unit), Block 4: Ground Floor + 22 Floors (252 Dwelling Unit), and Block 5: Club House : Ground Floor + 2 Floors and Open Swimming Pool (Totally 1099 Dwelling Units) at Chennai Outer Ring Road, Pazhanthandalam village, in S.No.182/1A, 1B, 2, 195/2A1, 2A2, 2B1, 2B2, 196/1, 2, 3, 197/1, 2, 3, 4, 198/1, 2, 3, 199, 200/3A1, 4, 202/5, 6, 203/1, 2, 3, 204/1A, 1B, 3, 205/2A, 214/2A, 215/1A, 2A, 216/1, 1B, 2, 217/1, 218/1, 2A, 2B, 219/1A, 1B, 1C, 2A1, 2A2, 2B1, 2B2, 3A, 3B, 4B, 221/1A, 2A1, 2B1, 222/1A, 387/2A, 2B, 389/1, 2, 390/1, 2, 400/1B, 2B, 3A1B, 401/1A, 402/1A, 1B, 2, 403/1, 2, 404/1A, 1B, 2, 405/1B, 2A, 2B AND 409/2 of Pazhanthandalam Village, Kundrathur Taluk, Kancheepuram District, Within the Limits of Kundrathur Panchayat Union. This has been updated to incorporate the current information on the structure.

A.1 STATUTORY REQUIREMENTS:

The design of structural and other building services will comply with the following requirements:

- National Building Code
- The Building Regulations Act
- The Environmental Protection Act in liaison with the Environmental Agency.
- Fire prevention and detection in compliance with the local Fire Regulation.
- ASHRAE.
- Any other applicable laws as advised by the client.
- Bureau of Indian Standard Codes.

B.0 DESIGN STANDARDS:


Specific applicable codes and standards will be identified and adopted in the design philosophies as appropriate to the structural elements. The latest editions of the Codes and Standards will be used in designs. All design work shall be based on Indian Standards and Codes with latest revision, with amendments if any, as on date.

Loads:

IS: 875-1987 Code of Practice for design loads (other than earthquake) for Buildings and structure (part 1, 2, 3, 4&5)

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/ 2024/ 2/ 0014
Reg. No. RSE100382019
Reg. No. CGLDIST/ SE/ Gr-I/ 2024/ 07/ 005

IS: 1911 Schedule of unit weights of building materials

Foundations:

IS: 1080 Code of Practice for design and construction of shallow foundations on soils (other than raft, ring and shell)
IS: 1904 Code of Practice for design and construction of foundations in soils general requirement
IS: 2950 Code of Practice for design and construction of raft foundations
IS: 2974 Code of Practice for design and construction of machine foundations (All parts)
IS: 8009 Code of Practice for calculation of settlement of foundations (All parts)
IS: 11089 Code of Practice for design and construction of ring foundation

RCC:

IS: 456 Code of Practice for plain and reinforced concrete
IS: 458 Specification for precast concrete pipes
IS: 3370 Code of Practice for concrete structures for the storage of liquids: (All parts)
IS: 3414 Code of Practice for design and installation of joints in buildings
IS: 3935 Code of Practice for composite construction
IS: 4326 Code of Practice for earthquake resistant design and construction of buildings
IS: 5525 Recommendation for detailing of reinforced concrete works
IS: 1786 Specification for high strength deformed steel bars and wires for concrete reinforcement
IS: 10262 Recommended guidelines for concrete mix design
IS: 11384 Code of Practice for composite construction in structural steel and concrete
IS: 1893 (Part-1) Criteria for earthquake resistant design of structures (General provisions and building).
IS: 1893 (Part-4) Criteria for earthquake resistant design of structures (Industrial structures including stack-like structures).
IS: 13920 Ductile Detailing of reinforced concrete structures subjected to seismic forces

Structural steel:

IS: 800 Code of Practice for general construction in steel
IS: 806 Code of Practice for use of steel tubes in general building construction
IS: 808 Dimensions for hot rolled steel beam, column channel and angle section
IS: 813 Scheme of symbols for welding
IS: 816 Code of Practice for use of metal arc welding for general construction in mild steel
IS: 1161 Steel tubes for structural purposes
IS: 2062 Structural steel (fusion welding quality)

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/2024/2/0014
Reg. No. RSE100382019
Reg. No. CGLDIST/ SE/ Gr-I/ 2024/ 07/ 005

IS: 4000	High Strength bolts in steel structures – Code of Practice
IS: 7215	Tolerances for fabrication of steel structures
IS: 9595	Recommendation for Metal arc welding of carbon and carbon manganese steel
IS: 12843	Tolerances for erection of steel structures

Miscellaneous:

IS: 432(part 2)	Specification for mild steel and medium tensile steel bars and hard-drawn steel wire for concrete reinforcement
IS: 8112	43 grade Ordinary Portland cement specification.
IS: 6313(part II)	Standards for anti-termite treatment
IS: 2751	Code of practice for welding of mild steel bars used for reinforced concrete construction
IS: 1346	Code of Practice for water proofing of roofs with bitumen felts
IS: 1742	Code of Practice for building drainage
IS: 1905	Code of Practice for structural use of unreinforced masonry
IS: 2470	Code of Practice for installation of septic tank:
(Part 1)	Design criteria and construction
(Part 2)	Secondary treatment and disposal of septic tank effluent
IS: 3067	Code of Practice for general design details and preparatory works for damp proofing and water proofing of buildings
SP: 6	Handbook for structural engineers (all parts)
SP: 7	National Building Code of India
SP: 20	Handbook on masonry design and construction
SP: 25	Handbook on causes and prevention of cracks in buildings
SP: 32	Handbook on functional requirements of industrial buildings
SP: 34	Handbook of concrete reinforcement and detailing (SCIP)


C. STRUCTURAL SYSTEM

The structural system adopted is as below, based on preliminary analysis and design, which have been elucidated later in this report.

- The structure shall be analyzed as 3D frame using Analysis software and the structure design would be based on limit state design complying with Indian codes of practices
- The foundation System shall be Raft Foundation as per soil test report, and SBC considered is 600kN/sqm.
- All slabs are designed as conventional slab system.
- All water retaining structures shall be designed as 'un-cracked section' of concrete as per IS 3370

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
 Structural Engineer
 Plot No. 555, VGP Layout, Mullai Street,
 Uthandi, Chennai - 600 119.
 Reg. No. SE/I/2024/2/0014
 Reg. No. RSE100382019
 Reg. No. CGLDIST/SE/Gr-I/2024/07/005

- Period of fire resistance considered is two hours. Cover for fire resistance will be as per Table 16-A of IS: 456 – 2000.
- Grade of steel Fe 550

GRADE OF CONCRETE FOR ALL MEMBERS

Raft Slab- M30

Columns- M40

Basement RC walls- M30

Mivan Shear Wall & Slab –M40, M35, M30

Slabs- M40, M35, M30, M25

Beams- M40, M35, M30, M25

Staircase- M40, M35, M30, M25

D. LOAD DATA

(I) DEAD LOAD

Self-weight of the materials shall be calculated on the basis of unit weights given in IS: 875 (PART I)


- | | | |
|--|---|--------------------------------|
| 1. Unit weight of reinforced cement concrete | = | 25 KN/m ³ |
| 2. Unit weight of plain cement concrete | = | 24 KN/m ³ |
| 3. Unit weight of AAC block | = | 7 KN/m ³ |
| 4. Unit weight of steel | = | 78.5 KN/m ³ |
| 5. Filling material of sunken floors | = | 7 KN/m ³ (Aerocon) |

(II) LIVE LOAD

- | | | |
|----------------|---|--------------|
| 1. Car Parking | : | 500 Kg / Sqm |
| 2. Kitchen | : | 200 Kg / Sqm |
| 3. Balcony | : | 300 Kg / Sqm |
| 4. Utility | : | 200 Kg / Sqm |

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
 Structural Engineer
 Plot No. 555, VGP Layout, Mullai Street,
 Uthandi, Chennai - 600 119.
 Reg. No. SE/I/2024/2/0014
 Reg. No. RSE100382019
 Reg. No. CGLDIST/ SE/ Gr-I/ 2024/ 07/ 005

5. Toilets	:	200 Kg / Sqm
6. Living Room, Bed Room	:	200 kg/Sqm
7. Terraces(Access not provided)	:	75 Kg / Sqm
8. Terrace floor (Access provided)	:	150 Kg / Sqm
9. Corridors, passages, lobbies and staircases including fire escapes		
a. For Residential buildings.	:	300 Kg / Sqm
b. For Industrial & Storage buildings.	:	500 Kg / Sqm
c. For All other buildings.	:	300 Kg / Sqm
10. Gym Area	:	400 Kg / Sqm
11. Billiards Room	:	300 Kg / Sqm
12. Sauna Room	:	300 Kg / Sqm
13. Table Tennis Section	:	500 Kg / Sqm
14. Fire tender Load	:	2000 kg/Sqm
15. Yoga, Aerobics	:	300 Kg / Sqm
16. Association room/FMS room	:	500 Kg / Sqm
17. Squash	:	300 Kg / Sqm
18. Indoor kids play area	:	300 Kg / Sqm
19. Creche	:	300 Kg / Sqm
20. Multi purpose hall	:	500 Kg / Sqm
21. Board games room	:	300 Kg / Sqm
22. Video games room	:	300 Kg / Sqm
23. Change room	:	200 Kg / Sqm
24. Art, painting, music deck	:	300 Kg / Sqm
25. Business center	:	350 Kg / Sqm

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
 Structural Engineer
 Plot No. 555, VGP Layout, Mullai Street,
 Uthandi, Chennai - 600 119.
 Reg. No. SE/I/2024/2/0014
 Reg. No. RSE100382019
 Reg. No. CGLDIST/SE/Gr-I/2024/07/005

26. Learning center	:	300 Kg / Sqm
27. AV room	:	500 Kg / Sqm
28. VR games	:	500 Kg / Sqm
29. Carom, Foosball, Air Hockey	:	300 Kg / Sqm
30. Lift Machine Room slab	:	1000 Kg / Sqm

Details of Dead Loads & Live Loads Considered for Residential Apartment.

The following are the imposed gravity loads (as per architectural drawing of each floors) adopted in addition to the self-weight (Self Weight of Slab / beam / columns are calculated as per the dimensions adopted in the respective drawings).

1. Ground Floor:

a. Super Imposed Load

LOAD COMPONENT	THICKNESS(mm)	LOAD INTENSITY
Finishes	100	2.5 KN/SQMT
Finishes Fire Drive Way.	200(In Podium Area)	5 KN/SQMT
Landscape loading (450mm depth as per architectural sections)	450 (with Wet density of 20 kN/m3)	9KN/m2

b. Live Load

LOAD COMPONENT	LOAD INTENSITY (KN/SQMT)
CAR PARKING and Inner Drive Way	5
Fire Drive Way	20

2. Typical Floor's

a. Super Imposed Load

LOAD COMPONENT	THICKNESS(mm)	LOAD INTENSITY
Finishes	50	1.5 KN/SQMT

FLOOR FINISH LOAD BREAK UP

Tile thickness = 12mm

Density = 20kN/m3

Load from tile = 0.24kN/m2

Screed+ Mortar thickness (for levelled surface) = 38mm



Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/2024/2/0014
Reg. No. RSE100382019
Reg. No. CGLDIST/SE/Gr-I/2024/07/005

Density = 20kN/m³

Load from screed + Mortar = 0.76kN/m²

Due to uncertainty in the surface level and Tile/ Granite, 1.5kN/m² SDL is considered.

b. Live Load

LOAD COMPONENT	LOAD INTENSITY (KN/SQMT)
Bed Room, Kitchen, Dining, Toilet	2
Utility, Balcony, Corridor/Passage and staircase	3

2. Terrace Floor's

a. Super Imposed Load


LOAD COMPONENT	THICKNESS (mm)	LOAD INTENSITY
Finishes	150	3 KN/SQMT

b. Live Load

LOAD COMPONENT	LOAD INTENSITY (KN/SQMT)
Terrace Area	2

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/2024/2/0014
Reg. No. RSE100382019
Reg. No. CGLDIST/SE/Gr-I/2024/07/005

(III) WIND LOADS

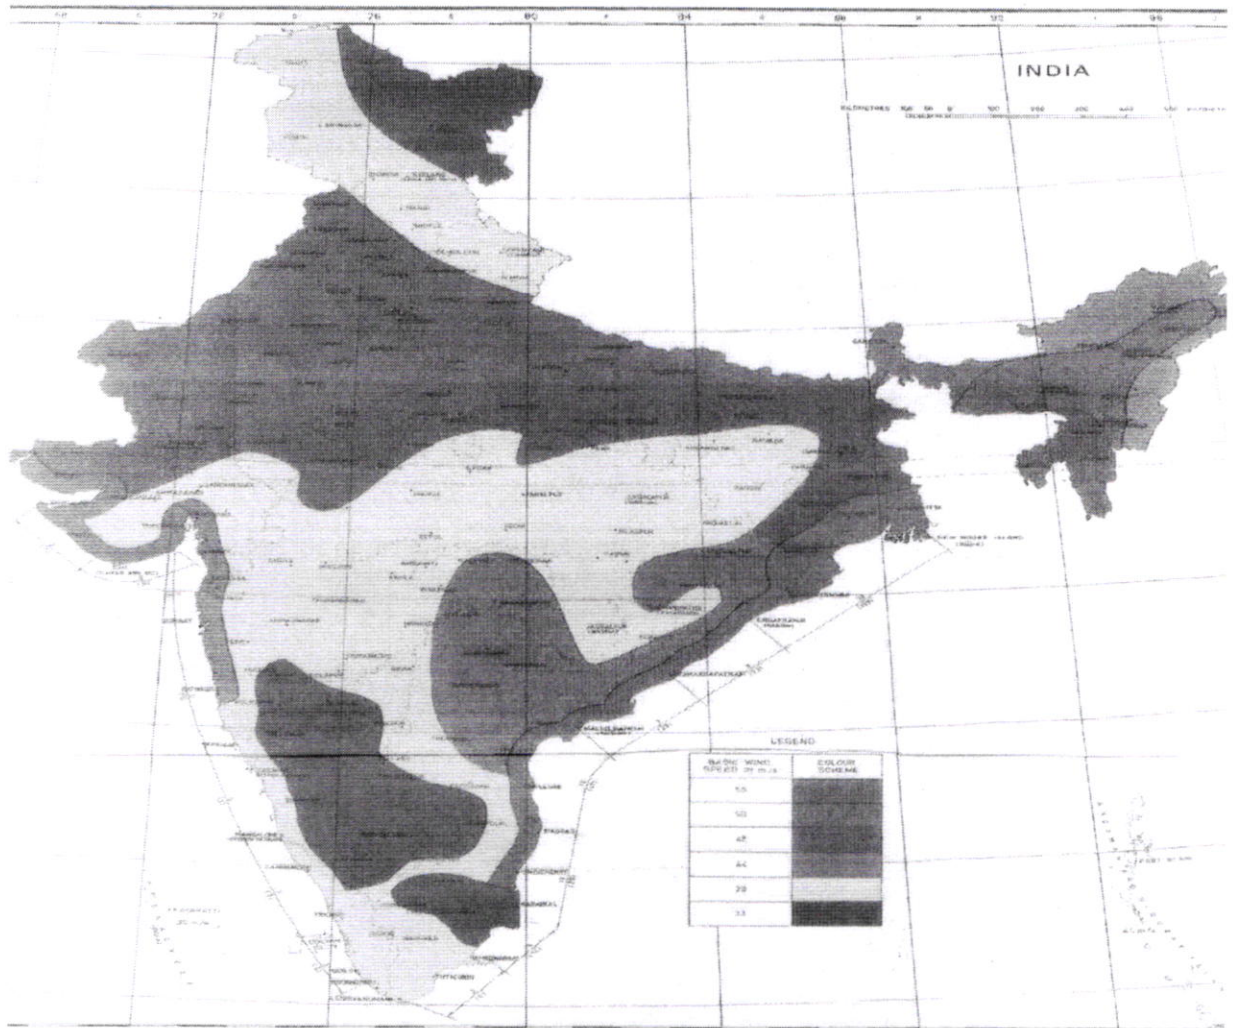


Fig.2 Basic Wind Speed

The following parameters are considered for the calculation of wind pressure for the proposed IT building [As per IS 875 (PART 3) :2015 CL: 6,7 & 10] :

Basic Wind Speed (V_b)	: 50 m/sec
Risk Coefficient (k_1)	: 1.0
Terrain, category and class	: Category 2
Size factor (k_2)	: 1.0(Calculated by considering the actual height of the Structure)
Topography factor (k_3)	: 1.00
Importance factor for Cyclonic Region(k_4)	: 1.00

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/SE/Gr-I/2024/07/005

Design wind speed V_z : $V_b \times k_1 \times k_2 \times k_3 \times k_4$
Design wind pressure P_z : $0.6 \times V_z^2$

(IV) SEISMIC LOAD

Seismic loads for design of structure shall be considered as per **IS 1893-2016**.


Zone : III
Zone factor : 0.16
Importance factor : 1.2
Response Reduction factor : 4.0
Damping ratio : 5%

The Time period for the proposed structure is calculated as per **IS 1893-2016**.

The ductile detailing if required of the structure elements would be done as per IS 13920-2016,
Confining Reinforcement will be designed as per **IS 13920-2016**.

E. ENVIRONMENTAL CONDITIONS, CORROSION AND FIRE PROTECTION FOR CONCRETE AND STRUCTURAL STEEL

- **Environment** : Moderate for all structures other than water retaining structure
- **Exposure conditions** : Concrete surfaces protected against weather or aggressive condition except those situated in coastal area
- **Fire protection** : Thickness of the structural elements as per cl.21.0 of IS456:2000



Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer

Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/ SE/ Gr-I/ 2024/ 07/ 005

Fire Resistance <i>h</i>	Minimum Beam Width <i>b</i>	Rib Width of Slabs <i>b_w</i>	Minimum Thickness of Floors <i>D</i>	Column Dimension (<i>b</i> or <i>D</i>)			Minimum Wall Thickness		
				Fully Exposed	50% Exposed	One Face Exposed	$p < 0.4\%$	$0.4\% \leq p \leq 1\%$	$p > 1\%$
	mm	mm	mm	mm	mm	mm	mm	mm	mm
0.5	200	125	75	150	125	100	150	100	100
1	200	125	95	200	160	120	150	120	100
1.5	200	125	110	250	200	140	175	140	100
2	200	125	125	300	200	160	–	160	100
3	240	150	150	400	300	200	–	200	150
4	280	175	170	450	350	240	–	240	180

NOTES

1 These minimum dimensions relate specifically to the covers given in Table 16A.

2 *p* is the percentage of steel reinforcement.

FIG. 1 MINIMUM DIMENSIONS OF REINFORCED CONCRETE MEMBERS FOR FIRE RESISTANCE

- **Minimum grade of concrete** : Moderate exposure – M30
- **Nominal cover to reinforcement** : For Moderate Exposure Nominal cover should not be less than 30 mm.

Type of Structural element	Min. Cover to reinforcement
Retaining wall	30 mm
Raft Footing base	50 mm
Raft Footing side face	75 mm

For 1.5 hr Fire Resistance Beams, Slabs and Columns Shall have the min Cover as Specified below: Ref: (Table 16A of IS456:2000)

Type of Structural element	Min. Cover to reinforcement
Beam	30 mm
Slabs	25 mm
Columns	40 mm
Mivan Wall	30 mm

F. TEMPERATURE AND SHRINKAGE EFFECT:

Horizontal floor displacement due to differential temperatures and shrinkage is of importance in long concrete buildings. It can be taken care of by either providing expansion joints at an appropriate spacing or designing structural members for the additional moments caused by the temperature and shrinkage effects.

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/SE/Gr-I/2024/07/005

TEMPERATURE LOADS:

The effect of temperature will be considered wherever applicable in accordance with relevant Indian Codes. The coefficient for thermal expansion and contraction will be in accordance with IS: 456 and IS: 800 for concrete and steel respectively.

G. EXCEPTIONAL LOADS:

- Loads due to the following catastrophe scenarios are not considered in the design.
- Exceptional loads due to terrorist attacks (Explosions)
- Accidental loads (Falling of aircraft on the building)
- Accidental hitting of vehicle on the facade
- Snow Load

G. DESIGN LOAD COMBINATION


The proposed building is designed using the limit state method with appropriate factors as per **IS: 456**, The load combinations are as follows

Load Combination

- 1.5(DL+LL)
- 1.5(DL+EQX)
- 1.5(DL-EQX)
- 1.5(DL+EQY)
- 1.5(DL-EQY)
- 1.5(DL+RSX)
- 1.5(DL-RSX)
- 1.5(DL+RSY)
- 1.5(DL-RSY)
- 1.5(DL+WLX)
- 1.5(DL-WLX)
- 1.5(DL+WLY)
- 1.5(DL-WLY)
- 1.2(DL+LL+EQX)
- 1.2(DL+LL-EQX)
- 1.2(DL+LL+EQY)
- 1.2(DL+LL-EQY)
- 1.2(DL+LL+RSX)
- 1.2(DL+LL-RSX)
- 1.2(DL+LL+RSY)
- 1.2(DL+LL-RSY)
- 1.2(DL+LL+WLX)

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer



Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/SE/Gr-I/2024/07/005

- 1.2(DL+LL-WLX)
- 1.2(DL+LL+WLY)
- 1.2(DL+LL-WLY)
- 0.9DL+1.5EQX
- 0.9DL-1.5EQX
- 0.9DL+1.5EQY
- 0.9DL-1.5EQY
- 0.9DL+1.5RSX
- 0.9DL-1.5RSX
- 0.9DL+1.5RSY
- 0.9DL-1.5RSY
- 0.9DL+1.5WLX
- 0.9DL-1.5WLX
- 0.9DL+1.5WLY
- 0.9DL-1.5WLY
- 1.5(DL+LL+TEMP)
- 1.5(DL+EQX+TEMP)
- 1.5(DL+TEMP-EQX)
- 1.5(DL+TEMP-EQY)
- 1.5(DL+TEMP+EQY)
- 1.5(DL+TEMP+WLX)
- 1.5(DL+TEMP-WLX)
- 1.5(DL+TEMP+WLY)
- 1.5(DL+TEMP-WLY)
- 1.2(DL+LL+TEMP+EQX)
- 1.2(DL+LL+TEMP-EQX)
- 1.2(DL+LL+TEMP+EQY)
- 1.2(DL+LL+TEMP-EQY)
- 1.2(DL+LL+TEMP+WLX)
- 1.2(DL+LL+TEMP-WLX)
- 1.2(DL+LL+TEMP+WLY)
- 1.2(DL+LL+TEMP-WLY)
- 0.9DL+1.5EQX+1.5TEMP
- 0.9DL-1.5EQX+1.5TEMP
- 0.9DL+1.5EQY+1.5TEMP
- 0.9DL-1.5EQY+1.5TEMP
- 0.9DL+1.5WLX+1.5TEMP
- 0.9DL-1.5WLX+1.5TEMP
- 0.9DL+1.5WLY+1.5TEMP
- 0.9DL-1.5WLY+1.5TEMP
- 1.2[DL+LL±(RSX±0.3RSY±0.3RSZ)]
- 1.2[DL+LL±(RSY±0.3RSX±0.3RSZ)]
- 1.5[DL±(RSX±0.3RSY±0.3RSZ)]
- 1.5[DL±(RSY±0.3RSX±0.3RSZ)]
- 0.9DL±1.5(RSX±0.3RSY±0.3RSZ)
- 0.9DL±1.5(RSY±0.3RSX±0.3RSZ)

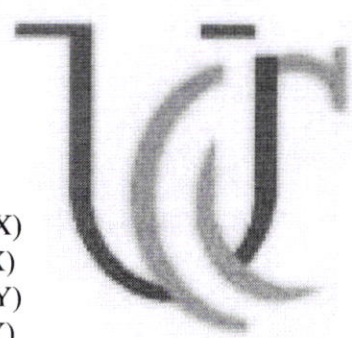

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Plot No. 555, VGP Layout, Mullai Street,

Uthandi, Chennai - 600 119.

Reg. No. SE/I/2024/2/0014

Reg. No. RSE100382019

Reg. No. CGLDIST/ SE/ Gr-I/ 2024/ 07/ 005

Where

- DL - Dead load
- LL - Live load
- WLX, WLY - Wind load in X and Y direction
- EQX, EQY, EQZ - Seismic load in X, Y and Z direction.
- RSX, RSY & RSZ - Spectrum loads in X, Y & Z direction.
- TEMP - Temperature loads.

H. REINFORCEMENT STEEL:

- All reinforcement shall confirm to IS: 1786 - 2008 having minimum yield strength of 550 N/sq-mm.(Fe550)

I. STRUCTURAL STEEL

- All structural steel shall confirm to IS: 226 - 1975 with minimum yield strength of 250 N/sq.mm(Fe 250)

J. DEFLECTION LIMITS

For Reinforced concrete works:

- Limiting values of deflection (Short and Long term) as per cl. 35.3 and 23.2 of IS: 456-2000 is followed in the design.
- Limiting value for short term deflection is considered as span/250 and for the long term deflection is considered as span/350 or 20mm whichever less as per IS 456 - 2000.
- The vertical deflection limits may generally be assumed to be satisfied provided that the span to depth ratios is not greater than the values obtained as below:

Continuous.....	26
Simply Supported.....	20
Cantilever.....	7
- As per IS1893 (Part1):2002, Story drift in any storey due to minimum specified design seismic lateral force shall not exceed 0.004 times the storey height.

K. CRACKING LIMITS

- Limiting values of crack width as per cl. 35.3 of IS: 456-2000 is followed in the design.
- In general for slabs and beams, the crack width is limited to 0.3mm.
- For water retaining structures, the water retaining portion of the structure will be designed as uncracked section.

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer


Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/2024/2/0014
Reg. No. RSE100382019
Reg. No. CGLDIST/SE/Gr-I/2024/07/005

F. FOUNDATION SYSTEM:

Foundation system of the structure is designed considering the recommendation from the Geotechnical report.

- The foundation system will be designed as raft foundation as per soil test report, and SBC considered is 600kN/sqm.
- Foundation system is designed by using CSI.SAFE.V 20.2 software.



A handwritten signature in blue ink, appearing to read 'Dr. J. Suresh', is located above the printed name.

Dr. J. SURESH, M.E., MIE., Ph.D.

Structural Engineer

Dr. J. SURESH, M.E., MIE., Ph.D.
Structural Engineer
Plot No. 555, VGP Layout, Mullai Street,
Uthandi, Chennai - 600 119.
Reg. No. SE/I/2024/2/0014
Reg. No. RSE100382019
Reg. No. CGLDIST/SE/Gr-I/2024/07/005