
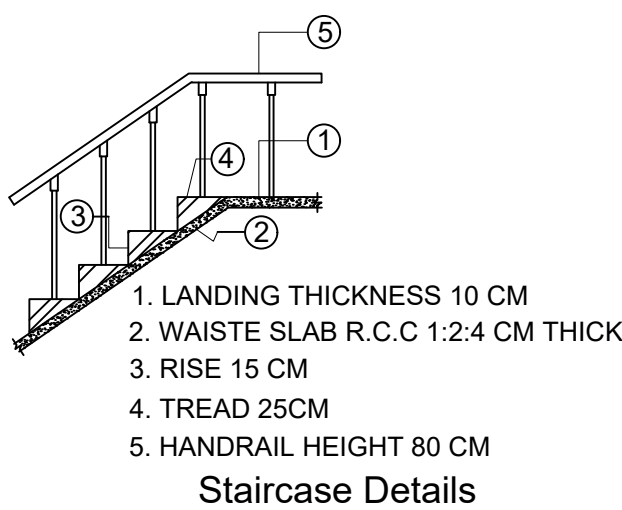
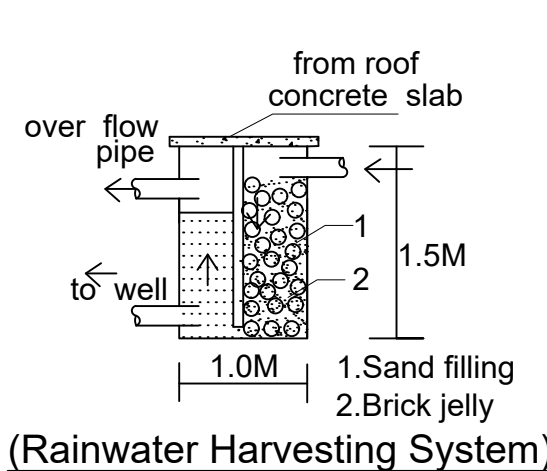
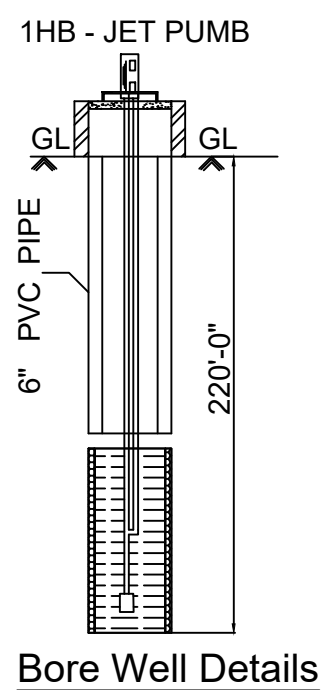
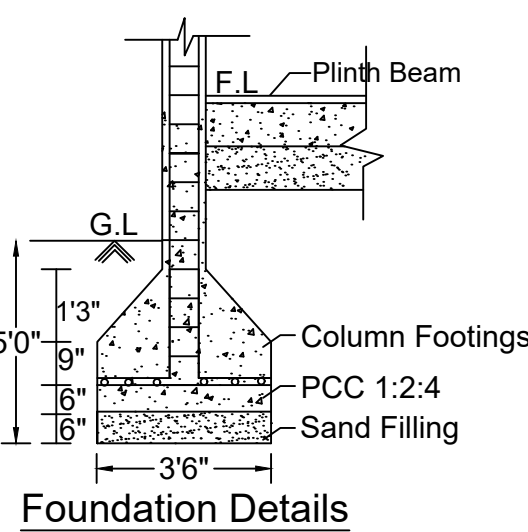
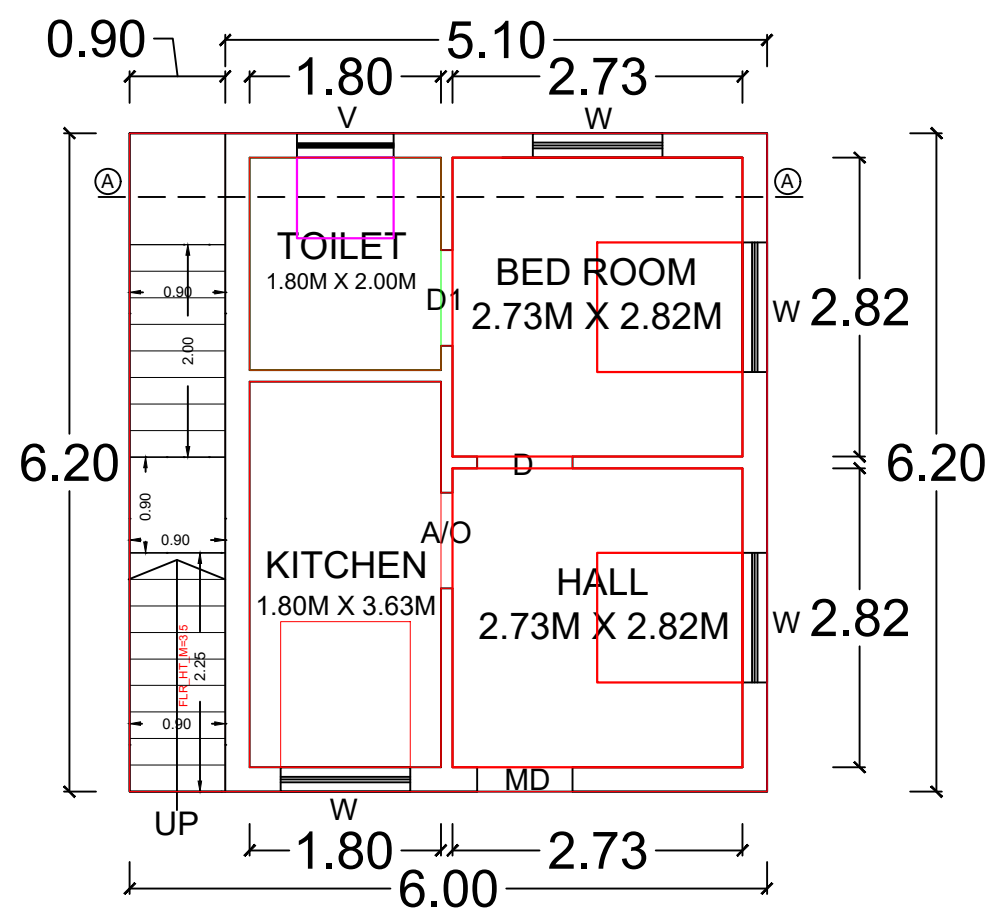
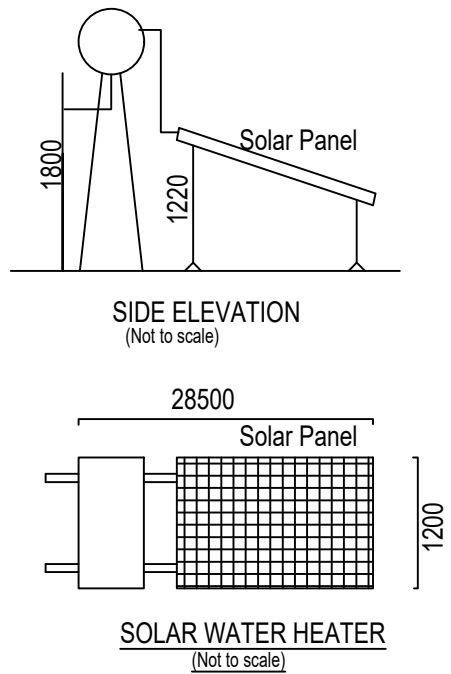
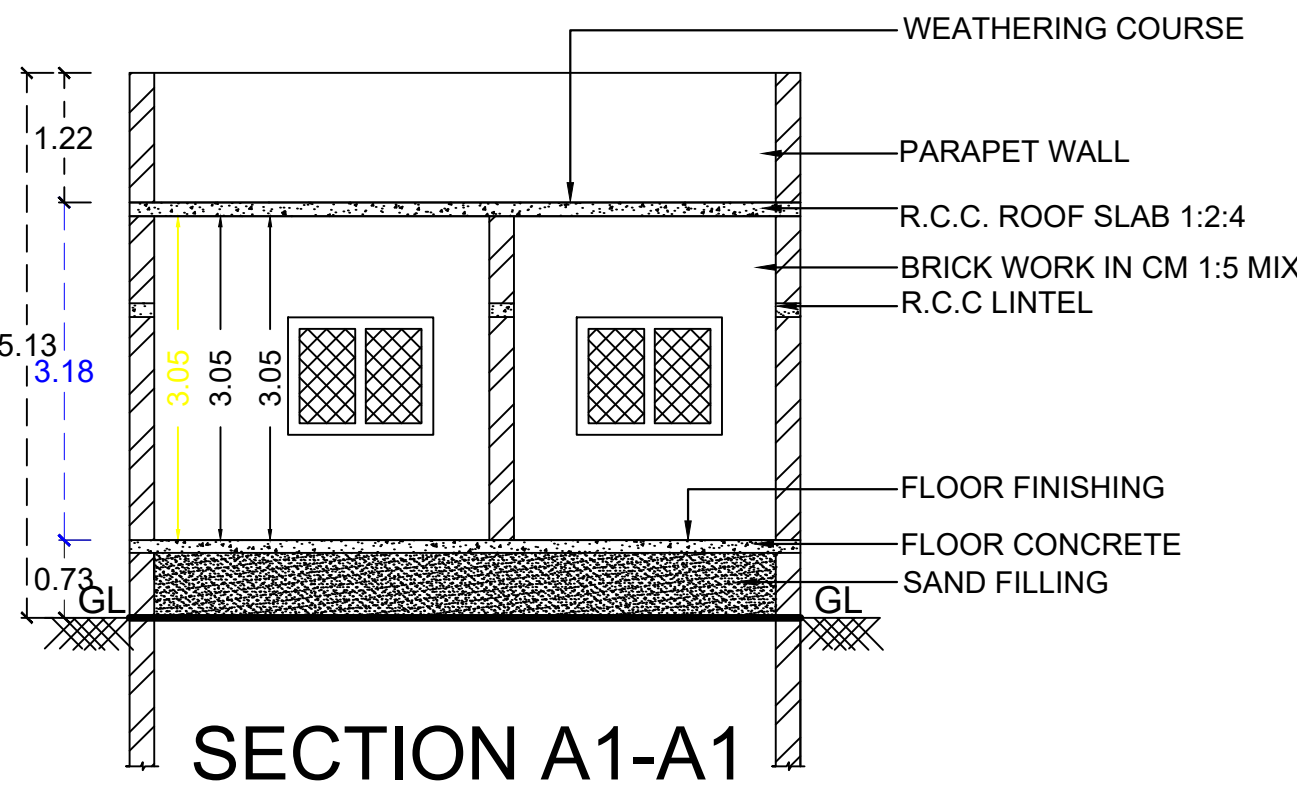
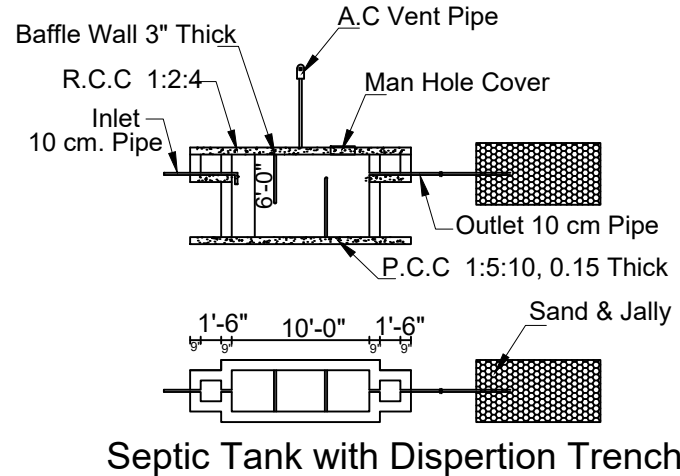


PLAN SHOWING THE CONSTRUCTION OF R.C.C. ROOF
RESIDENTIAL BUILDING IN GROUND FLOOR AT
S.NO.109-9A2-PART, IDAYAMELUR VILLAGE &
PANCHAYAT, IDAYAMELUR GROUP, SIVAGANGAI
TALUK & DISTRICT.

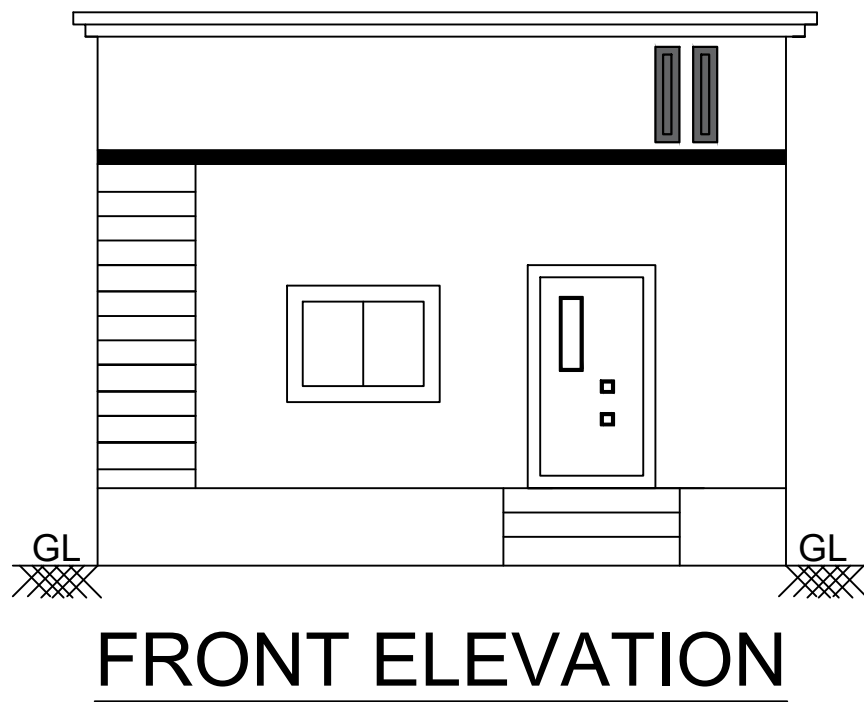


6.10M WIDE ROAD



22.86

6.10M WIDE ROAD

18.59

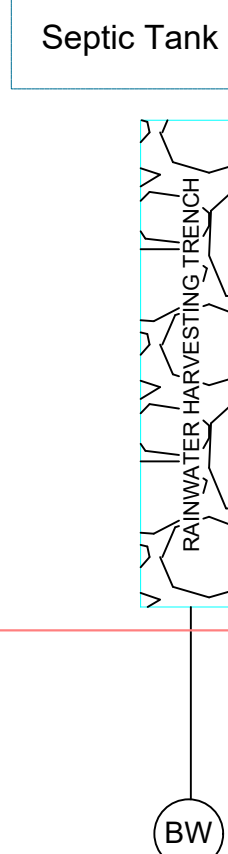

PROPOSED
BUILDING

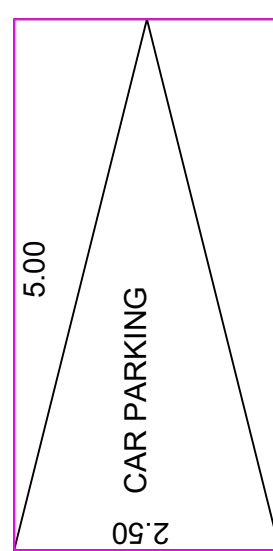

6.10M WIDE ROAD

SITE PLAN
(1:100)

SITE OF PERIYAKARUPPAN

21.94

15.54

SPECIFICATIONS

1. SAND FILLING
2. P.C.C. MIX RATIO 1:5:10 40MM METAL
3. R.C.C. ISOLATED FOUNDATION
4. BRICK WORK CM MIX RATIO 1:6
- 5 R.C.C. 1:1.5:3 MIX AS PER IS 456 : 2000

SCHEDULE OF JOINERIES


MAIN DOOR MD	1.20 X 2.10
DOOR D	1.00 X 2.10
DOOR D1	0.90 X 2.10
WINDOW W	1.20 X 1.20
VENTILATOR V	0.90 X 0.60

PLINTH AREA DETAILS

PLOT AREA	4080.00 SQ.FT	379.04 SQ.M
GROUND FLOOR AREA	400.00 SQ.FT	37.20 SQ.M
VACANT AREA	3680.00 SQ.FT	341.84 SQ.M


COLOR INDEX

	SITE / BOUNDARY AREA
	PROPOSED BUILDING
	EXISTING ROAD



PARKING CALCULATION:-
Floor Area above 75.00sq.m = 1 Car Parking

PARKING PROVIDED:-
No. of Car Pockets : 1
No. of Bike Pockets : 2



F.S.I DETAILS	PROPOSED	PERMISSIBLE
Total Plinth Floor Area Site Area = 37.20 = 379.04	0.10	2.00

APPLICANT

Mr.P.KARUPPAIYA S/O Mr.PERIYANNAN

ENGINEER

Er. R. ANBAZHAGAN, B.E.,F.I.E.,F.I.V.,
REGISTERED DTCP ENGINEER
REGD. NUMBER: RE/Gr.I/SVG Region/001/2019,
SIVAGANGAI MUNICIPALITY,
6, THIRUPPATHUR ROAD,
(NEAR ANJANEYAR KOIL)
SIVAGANGAI - 630 561.
CELL NO: 98653 48124.

OFFICE USE