PLAN SHOWING THE PROPOSED CONSTRUCTION OF GROUND FLOOR IN EXISTING BUILDING (AFTER DEMOLISHING) A RESIDENTIAL BUILDING IN OLD S.NO: 42/3, NATHAM S.NO:663/4B"OLD HOSPITAL WEST 1st STREET ", PATTA NO: 2649, D.NO: 12-6/32, 12-6/34, (DEMOLISHING BUILDING D.NO 12-6/34A), OLD WARD NO:12, NEW WARD NO:10, AMBATHURAI VILLAGE AND CHINNALAPATTI TOWN PANCHAYAT, ATHOOR TALUK & DINDIGUL DISTRICT.

APPLICANT NAME : 1. Mrs.M.NITHYA, W/O Mr.MURUGAN, 2.Mrs.V.DHANALAKSHMI, W/O Mr.VICKNESAN, 3.Mrs.L.SANTHI, W/O Mr.LINGUSAMY

SCALE : I INCH = 8 FEET (or) 1 :100.



FRONT ELEVATION

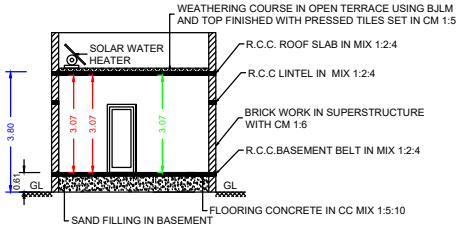

SECTION ON A-A

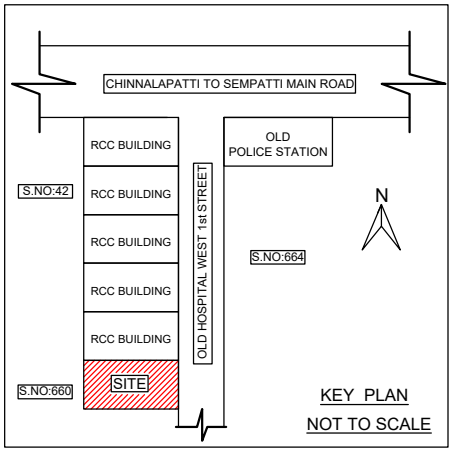

KEY PLAN

NOT TO SCALE

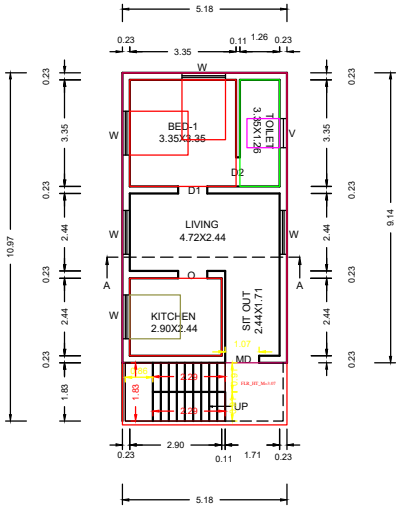

GROUND FLOOR PLAN

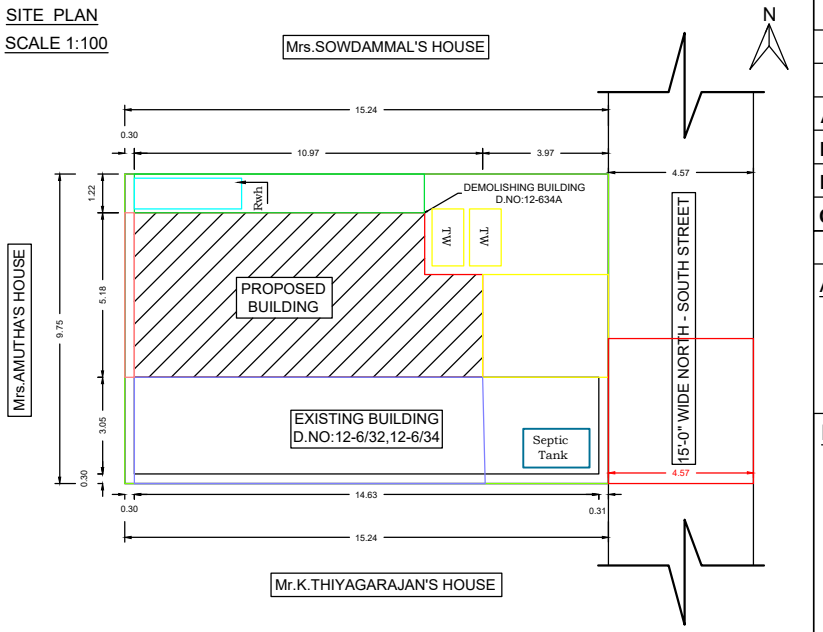

SPECIFICATION :

FOUNDATION	:	R.C.C. COLUMN FOUNDATION
BASEMENT	:	BRICK WORK WITH CM 1:6 MIX.
SUPERSTRUCTURE	:	BRICK WORK IN CM 1:6 MIX.
ROOFING	:	R.C.C. ROOF SLAB 1:2:4 MIX, 4-½" TH.
FLOORING	:	C.C. FLOORING 1:5:10 MIX AND TOP FINISHED WITH CERAMIC TILES
PLASTERING	:	PLASTERING WITH CM 1:5 MIX 12mmTHICK.
PURPOSE	:	RESIDENTIAL BUILDING.

LIST OF JOINERIES :

DOOR :

MD	3'-6" X 7'-0"	1.06 X 2.13
D1	3'-0" X 7'-0"	0.91 X 2.13
D2	2'-6" X 7'-0"	0.76 X 2.13
O	3'-0" X 7'-0"	0.91 X 2.13

WINDOW :

W	4'-6" X 4'-0"	1.37 X 1.21

VENTILATOR :

V	3'-0" X 2'-0"	0.91 X 0.60

AREA STATEMENT

DESCRIPTION	Sft	Sqm
APPLICANT'S SITE	1600	148.65
EXI . GROUND FLOOR	480	44.60
PRO. GROUND FLOOR	619	57.50
OPEN SPACE	501	46.55

FSI : 0.68 PLOT COVERAGE :68.68

APPLICANT :

1.
2.
3.

LBS / ENGINEER :

Er.S.SARAVANAKUMAR.D.C.E.LBS,
Registered Engineer Grade - III
Sri Saravana Constructions
G.P.S. Complex,High School Road,
Kairasi Jewellery Near,
Chinnalapatti-624 301
Cell: 7708404856



TRIAL PIT (NTS)



RAIN WATER PERCOLATION PIT (NTS)



STAIRCASE DETAILS (NTS)



FOUNDATION DETAIL

SEPTIC TANK DETAIL

Signature Not Verified
Signed by: Executive Officer
Location: Dindigul
Date: 2024.01.12 14:42:18

OFFICE USE

Building Permission:-
Roc. No,:- 1734/2023/C
Building Permission:- 84/2023/2024
/E Signed/
Executive officer
Special Grade Town Panchayat
Chinnalapatti
Dindigul District