**PLAN SHOWING PROPOSED CONSTRUCTION OF DWELLING HOUSE GROUND FLOOR IN S.NO .255/2A3,PATTA NO.6138 AT ORUTHATTU VILLAGE ,AMMAYANAIKANUR TOWN PANCHAYAT ,NILAKOTTAI TK,DINDIGUL DIS.**

**APPLICANT NAME :MR.MURUGAN S/O RAMASAMY**

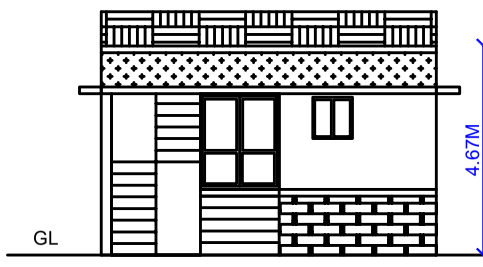


FRONT ELEVATION.

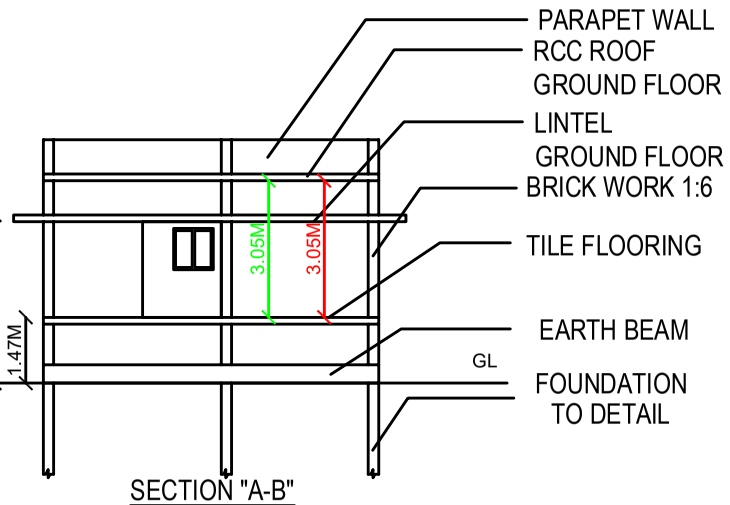


SECTION "A-B"

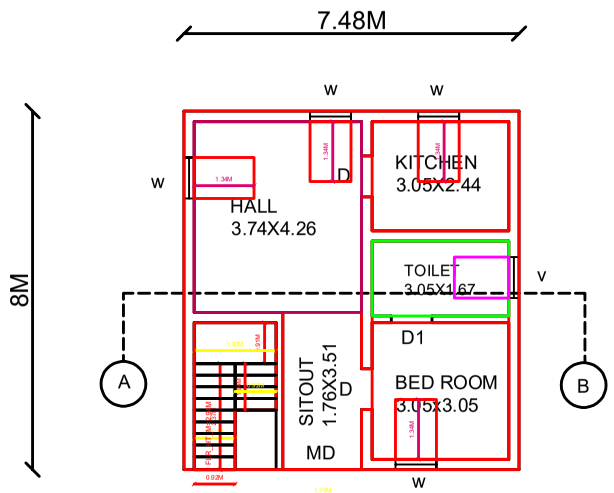


PRO. GROUND FLOOR PLAN.




SECTION OF SEP.TANK




PLAN
SEPTIC. TANK

NOTE:
D.T.C.P ,REGISTER NO :
RE.GR-III2024/02/01
DATE :23.02.2024

## SITE PLAN

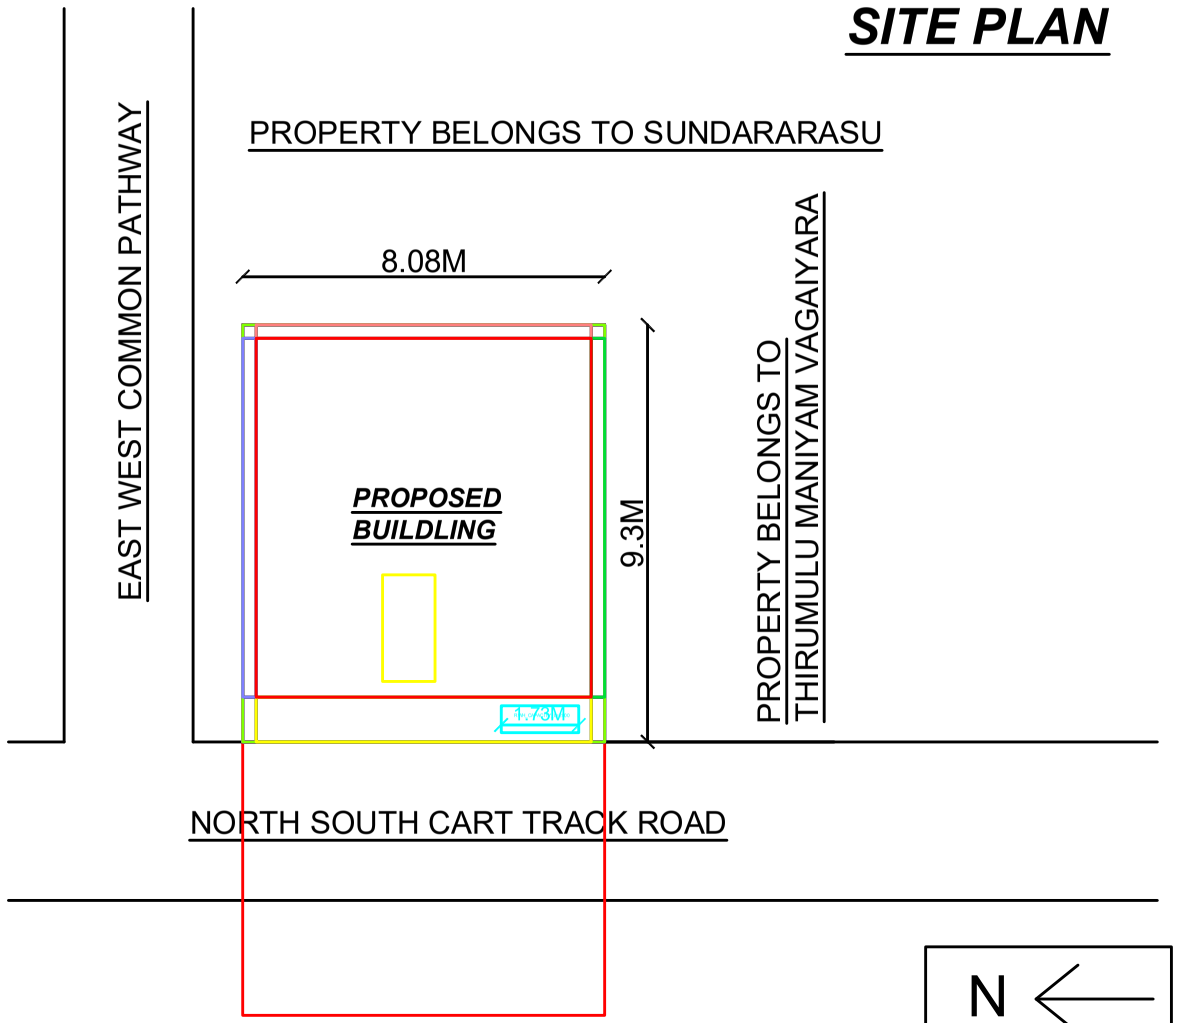


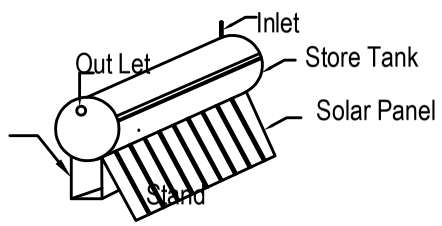


**Solar Water Tank Details**

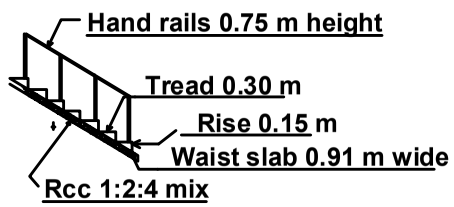


**Staircase Details**

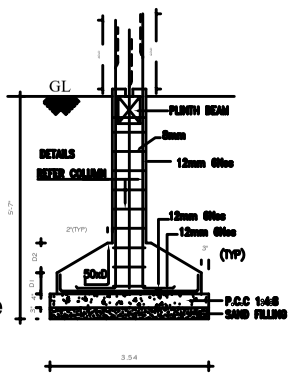


FOUNDATION DETAILS
SCALE : 1:50.

**SPECIFICATIONS:**

1. R.C.C FOOTINGS FOR FOUNDATION IN M20 MIX
2. R.C.C. COLUMNS IN M20 MIX
3. R.C.C. ROOF SLAB AND BEAMS IN M20 MIX
4. 9" BRICK WORK IN C.M 1:5 IN SUPER STRUCTURE
5. COUNTRY WOOD DOORS WITH FLUSH SHUTTERS
6. COUNRTY WOOD GLAZED WINDOWS
7. INTERNAL PLASTERING IN C.M 1:4
8. EXTERNAL PLASTERING IN CM 1:5
9. WEATHERING COURSE IN BRICK JELLY LIME CONCRETE
10. WEATHERING TILES IN 9"X9" BURNT CLAY TILES IN M6 MIX

| AREA STATEMENT | SQ.FT | SQ.M |
|---|---|---|
| PLOT AREA (AS PER DOCUMENT) | 808.25 | 75.09 |
| PLOT AREA (AS PER PATTA) | 808.25 | 75.09 |
| PLOT AREA ( AS PER SITE ) | 808.25 | 75.09 |
| FSI AREA<br>PRO. GROUND FLOOR AREA | 643.87 | 59.84 |
| OPEN SPACE AREA | 164.09 | 15.25 |

| JOINERIES | |
|---|---|
| MAIN DOOR MD | 1*2.10 |
| DOOR D | 0.90*2.10 |
| DOOR D1 | 0.75*2.10 |
| WINDOW W | 0.90*1.22 |
| VENTILATOR V | 0.66*0.66 |



REGISTERED ENGINEER.

Signature Not Verified
Digitally signed by Executive Officer
Date: 2026.04.04 11:44:20