




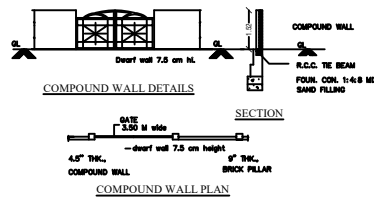
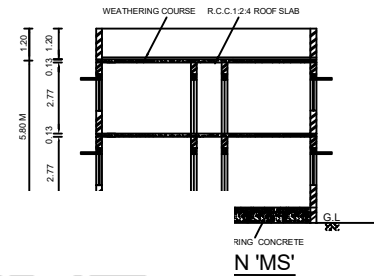

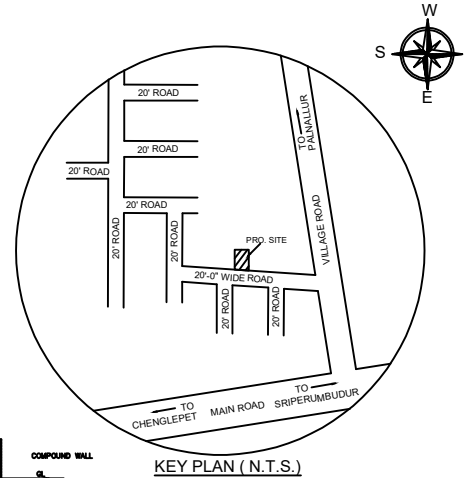





(APP. DTCP NO. 368 / 2020, DATED: 30 / 01 / 2020) &
LOCAL BODY PROCEEDINGS NO. 638 / 2025 / A4, DATED: 04 / 03 / 2025)



SPECIFICATION	
1. EARTH WORK	ALL EARTH WORK EXCAVATION IN FOUNDATION TO BE DONE AS PER THE DIMENSIONS GIVEN IN THE DRAWING.
2. SAND FILLING	ALL FOUNDATION TO BE FILLED WITH RIVER SAND 150MM THICK.
3. PCC 1:4:8	ALL FOUNDATION FILLED WITH PCC 1:4:8 150 MM THICK AND SHOULD BE RAMMED.
4. MASONRY WORKS	ALL MASONRY WORKS SHOULD BE IN FIRST CLASS BRICK IN CEMENT MORTAR 1:6.
5. RCC WORKS	ALL RCC WORKS IN CC 1:2:4 WITH REQ. STEEL.
6. JOINERIES	TEAK WOOD MAIN DOOR AND ALL OTHER DOORS ARE USED COUNTRY WOOD.
7. PLASTERING	ALL INTERIOR AND EXTERIOR PLASTERING ARE IN CEMENT MORTAR 1:4. 12 MM THICK.
8. ROOFING	ROOFING WITH REINFORCED CEMENT CONCRETE ROOF.

JOINERY DETAILS			
D	DOOR	-	1.07 M X 2.10 M
D1	DOOR	-	0.91 M X 2.10 M
D2	DOOR	-	0.75 M X 2.10 M
W1	WINDOW	-	1.22 M X 1.22 M
V	VENTILATOR	-	0.91 M X 0.60 M

AREA DETAILS	SQ. FEET	SQ. METRE
☐ <u>PLOT AREA :</u> AS PER DOCUMENT	1575.00	146.39
AS PER SITE	1575.73	146.39
AS PER FMB	1343.12	144.16
☐ <u>PROPOSED BUILDING</u> FOR GROUND FLOOR	1082.10	100.53
FOR FIRST FLOOR	1082.10	100.53
TOTAL BUILT UP AREA	2164.20	201.06
PLOT COVERAGE	70 %	
FLOOR SPACE INDEX	1.39	

OWNER	SCALE
<i>C. S. Balakrishna</i>	1: 100

LICENSED SURVEYOR



M. SURESH KUMAR D.C.E.,
CONSULTING ENGINEER & TOWN PLANNER
MS PLANNER
OFF: NO. 202 /133, GANDHI ROAD
SRIPERUMBUDUR - 602105
CELL: 9994 68 28 38