



Your trusted partner for buying, selling, and managing property,
ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate

+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified  RealEstate™





TAMIL NADU FIRE AND RESCUE SERVICES DEPARTMENT.

From
Thiru. Abhash Kumar, I.P.S.,
DGP / Director,
Tamil Nadu Fire and Rescue Services,
No.17, RukmaniLakshmipathiSalai,
Egmore, Chennai - 600 008.


To
The Member Secretary,
Chennai Metropolitan
Development Authority,
No.1, Gandhi Irwin Road,
Egmore, Chennai - 600 008.

R.Dis.No.6262/C1/2023
PP NOC No.74/2023

Dated.30.05.2023

000786

Sir,

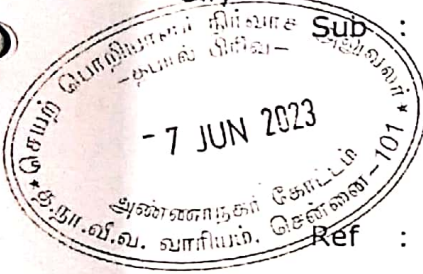

Sub : Tamil Nadu Fire and Rescue Services - Directorate - High Rise Building - Issue of Planning Permission NOC requested - Inspection at M/s. The Executive Engineer & ADO, TNHB, T.S.No.22, Block No.33 of Ayanavaram Road, Ayanavaram, Chennai - Reg.

Ref : 1) The CMDA letter No.CMDA/PP/HRB/N/188/2023, dated:11.04.2023.
2) The Joint Director, Northern Region, Report Rc.No.1991/C/2023 Dated:19.05.2023.

Kindly refer to the letter cited above. The MSB inspection committee of the northern region has inspected the site of M/s. The Executive Engineer & ADO, TNHB, T.S.No.22, Block No.33 of Ayanavaram Road, Ayanavaram, Chennai for which the PP NOC has been requested. The committee has made certain observations with regard to fire and life safety, which are reproduced below:-

Observation:

It is a planning proposal for the construction of residential building cum commercial building consisting of 3 blocks. **Block A & B** consisting of stilt floor (parking) + 13 floors with the equal height of 42 meters up to terrace level. **Block C (shops)** consisting of ground floor + 2 floors height of 11.10 meters up to terrace level. The plot area is 7702.23 sq. mtrs and total buildup area is 19950.47 sq. mtrs. The proposal has side setback of 9 meters

at all around the building (both residential and mercantile). The building is classified to come under Group "A" Residential Building, Sub-Division "A-4" Apartment and Group F – Mercantile Building, Sub-Division F-2 Shops as per the classification of the National Building Code of India Part IV fire and life safety – 2016.

The following fire & life safety measures should be provided in the proposed residential building before the issue of compliance certificate as listed below:

1. There should be a wet-riser along with hose reel assembly per thousand square meters area covering all floor areas with landing valves along with delivery hoses. The raiser should be fully charged with adequate pressure at all times & should have both automatic and manual operation. To feed the wet-riser and sprinkler system an underground static water tank of minimum capacity 75000 liters should be provided with refilling facilities. A terrace level tank of capacity 5000 liters also should be provided in respective towers. One set of pump contains an electrical pump of capacity 2280 LPM and equal capacity of one diesel Pump and an electrical pump of capacity of 180 LPM as a Jockey pump should be provided near the underground water tank. The pumps should be capable of developing pressure of 3.5 kg/cm² at terrace level hydrant point.
2. Fire service inlets fitted with NRV at ground level should be provided.
3. Manually operated electric fire alarm system including talk back system to be provided at all floors.
4. The first aid firefighting equipment's should be provided at all floors in accordance with the IS 2190: 2010 requirements.
5. Automatic sprinkler system should be provided at stilt floor (if used as parking) for **block – A & B.**
6. Public Address System should be provided connecting all the floor.
7. Lightning arrester should be provided.
8. Alternative & independent power systems should be provided to fire pumps, emergency lighting system and fire lift.

9. Number of ramp, exit, location and its width should be conforms to the requirements of NBC of India, Part 4, Second Revision 2016.

10. Fire exit - internal staircases and external staircase:

For residential building:-

Two staircases are provided and atleast one staircase should be designated as fire escape staircase and should be pressurized as per the clause 4.4.2.5 of the requirements of National Building Code of India.

As per clause 4.4.2.4.3.2 of the National Building Code of India part IV fire and life safety 2016 – As per plan the staircases have a minimum width of 1.25 meters without railing. The minimum width of tread without nosing shall be 250 mm for residential building and the tread shall be constructed and maintained in a manner to prevent slipping. The maximum height of riser shall be 150 mm for residential building and the number shall be limited to 12 per flights.

Every exit, exit access or exit discharge shall be continuously maintained free of all obstructions or impediments to full use in the case of fire or other emergency.

All exits shall provide continuous means of egress to the exterior of a building or to an exterior open space leading to a street.

Exits shall be so arranged that they may be reached without passing through another occupied unit.

As per clause 4.4.2.4.3.4 of the National Building Code of India part IV fire and life safety 2016 - All external stairs shall be directly connected to the ground.

Entrance to the external stairs shall be separate and remote form the internal staircase.

Care shall be taken to ensure that no wall opening or window opens on to or close to an external stairs.

The route to the external stairs shall be free of obstructions at all times.

The external stairs shall be constructed of non-combustible materials and any doorway leading to it shall have the required fire resistance.

No external staircase, used as a fire escape, shall be inclined at an angle greater than 45 degrees from the horizontal.

❖ **Fire lifts:** As per clause 4.4.2.4.3 (h) (6) of NBC 2016. Lift shall not open in staircases. Staircases should not be placed opposite each other.

At least one lift should be designated as Fire lift. Fire lifts shall be provided with a minimum capacity for 8 passengers and fully automated with emergency switch on ground level. In general, buildings 15m in height or above shall be provided with fire lifts.

In case of fire, only fireman shall operate the fire lifts. In normal course, it may be used by other persons.

Each fire lift shall be equipped with suitable inter-communications equipment for communicating with the control room on the ground floor of the buildings.

The number and location of fire lifts in a building shall be decided after taking into consideration various factors like building population, floor area, compartmentation, etc.,

11. Firefighting shaft (fire tower): An enclosed shaft having protected area of 120 min fire resistance rating comprising protected lobby, staircase and fireman's lift, connected directly to exit discharge or through exit passageway with 120 min fire resistant wall at the level of exit discharge to exit discharge. These shall also serve the purpose of exit requirement / strategy from the occupants. The respective floors shall be approachable from Firefighting shaft enable the Fire fighters to access the floor and also enabling the Fire fighters to assist in

evacuation through fireman's lift. The firefighting shaft shall be equipped with 120 min fire doors. The firefighting shaft shall be equipped with fireman talk back, wet riser and landing valve in its lobby, to fight fire by fire fighters.

12. The applicant should not provide any obstruction like transformer yard, generator, swimming pool, landscape, LPG bank etc., in the setback area, so as to facilitate the easy movement and operation of an aerial ladder platform vehicle during emergency. The setback area should not have any slope / gradient and not be elevated from the ground level.

13. Vehicular access within the site – Internal vehicular access way including passage if any within the site shall have a clear width of 7.2m.

14. Fire fighting pump house

As per clause 5.1.2.2 of the National Building Code of India part IV fire and life safety 2016

- a) Pump room provided at the ground level.
- b) Pump housing shall be installed not lower than the first basement.
When installed in the basement, staircase with direct accessibility (or through enclosed passageway with 120 min fire rating) from the ground, shall be provided. Access to the pump room shall not require to negotiate through other occupancies within the basement.
- c) Pump house shall be separated by fire walls all around and doors shall be protected by fire doors (120 min rating).
- d) Pump house shall be well ventilated and due care shall be taken to avoid water stagnation.
- e) No other utility equipment shall be installed inside the fire pump room.
- f) Insertions like flexible couplings, bellows, etc., in the suction and delivery piping shall be suitably planned and installed.
- g) Installation of negative suction arrangement and submersible pumps shall not be allowed.

- h) Pump house shall be sufficiently large to accommodate all pumps and their accessories like PRVs, installation control valves, valves, diesel tank and electrical panel.
- i) Battery of diesel engine operated fire pump shall have separate charger from emergency power supply circuit.
- j) Exhaust pipe of diesel engine shall be insulated as per best engineering practice and taken to a safe location at ground level, considering the back pressure.

For mercantile building:-

1. There should be a down comer system along with hose reel assembly per thousand square meters area covering all floor areas with landing valves along with delivery hoses. Hence, two number of shafts should be provided. The system should be fully charged with adequate pressure at all times & should have both automatic and manual operation. To feed the system a terrace level water tank of minimum capacity 25000 liters should be provided with refilling facilities. To charge the system an electrical pump of capacity 900 LPM should be provided near the terrace level water tank. The pump should be capable of developing pressure of 3.5 kg/cm^2 at terrace level hydrant point.
2. Manually operated electric fire alarm system including talk back system to be provided at all floors.
3. The first aid firefighting equipment's should be provided at all floors in accordance with the IS 2190: 2010 requirements.
4. One staircase is provided. As per clause 4.4.2.4.3.2 of the National Building Code of India part IV fire and life safety 2016 – As per plan the staircases have a minimum width of 1.50 meters without railing. The minimum width of tread without nosing shall be 300 mm for mercantile building and the tread shall be constructed and maintained in a manner to prevent slipping. The maximum height of riser shall be 150 mm for mercantile building and the number shall be limited to 12 per flights.

15. Service ducts and shafts: As per clause 3.4.5.4 of the National Building Code of India part IV fire and life safety 2016.
16. Fire lift, electrical installation and wiring, AC duct & other service ducts should meet the requirements of NBC of India, Part 8, 2016.
17. The width and height of any arch or gate, if any, should have the clearance of not less than 7 m respectively.
18. The compulsory open space as per DCR set back area all around the building should be designed to withstand a weight of 64 tons at any point of operation for the use of hydraulic platform vehicle. In any case, no ramp, landscape garden and swimming pool shall be allowed in the setback area. The entire setback area earmarked shall be hard paved or provided with reinforced concrete so as to withstand the weight of the aerial ladder platform.
19. The service ducts such as power cables, communication cables, A/C ducts etc., should be protected with proper fire sealing/fire dampers.
20. The cable gallery should be routed through fire resistant duct or fire protected tray. Suitable detectors shall be provided along the lines of the cable gallery.
21. As per section 3.2 of BIS 12459, 1988 – code of practice for fire safety in cable regularization, 1m transparent fire retardant coatings shall be applied to all cables at termination points in electrical panels and all cables inside the distribution boxes.
22. Fire resistant and low smoke emission cable should be used.
23. Assembly points should be designated at the ground floor as per the requirements of fire and life safety measures.
24. Dos and don'ts laminated hanging pads should be available in all floors in prominent places.
25. Evacuation route plan should be displayed in each floor at prominent places.
26. If the construction is done with prefabricated materials, sufficient natural vent / mechanized ventilation system should be provided.
27. A trained fire officer with a crew shall be arranged to maintain as well as to operate the fire protection systems in case of any need.

62.


- The MSB inspection team has recommended to issue of planning permission / no objection certificate to the proposed building subject to the fulfillment of the above mentioned conditions.

for Director,
Fire and Rescue Services,
Tamil Nadu.

M/s. The Executive Engineer & ADO,
Tamil Nadu Housing Board,
Anna Nagar Division, Anna Nagar,
Chennai - 600 106.



to:
The Joint Director, Fire and Rescue Services,
Northern Region, Chennai.

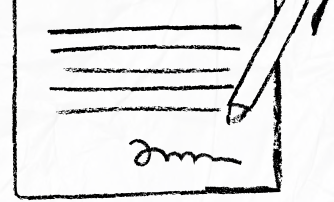

our services doesn't just end there



Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.



Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.



Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.




NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management



Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



 **empowering your real estate decisions
with smart tools**



Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter



Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer



Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator



Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary



Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management



We're honored to be part of your
real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
[+91 9996 12 9996](tel:+919996129996)
www.verified.realestate