Verified RealEstate™

Your trusted partner for buying, selling, and managing property, ensuring hassle-free service with 100% transparency.

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996

Official Property Record

Digitally Verified Record - Powered by Verified RealEstate™



CONSULTANTS	**GEO MINES ENGINEERS PVT. LTD.** **GEOTECHNICAL ENGINEERING DIVISION,** **#96, 3rd FLOOR, VELLALAR STREET,** **MOGAPPAIR WEST, CHENNAI-600037** **Ph. No. 98413 16631, 9840157478** **Email: geomines@gmail.com, gmepl77@gmail.com** **Website: www.geominesengineers.com**
CLIENT	**SREEROSH PROPERTIES PVT. LTD., CHENNAI**
PROJECT	**PROPOSED CONSTRUCTION OF RESIDENTIAL BUILDING (STILT+05) AT GILL NAGAR, CHOOLAIMEDU, CHENNAI**
TITLE	**GEOTECHNICAL INVESTIGATION REPORT**

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

For Geo Mines Engineers Pvt Ltd

Director

GEOMINES ENGINEERS (P) LTD. GMEPL Chennai

REV.	DATE	REPORT NUMBER	PREP. BY
0	12-04-2024	GMEPL/SREEROSH PROPERTIES PVT. LTD /025/2024-25	

SDISCLAIMER

We've been asked to look into the ground and identify and quantify everything that mother nature has put there and predict how those materials will react to construction and long-term performance of a facility - and we may fall short of this lofty goal.

We have made reasonable and prudent conclusions but a cloud of uncertainty inherently looms over the project as per the pre and post facilities laid and their elemental behaviour on the mother soil.

Also, the variable nature of soil strata and it's varying characteristics may make the recommended foundation system disqualify and hence it's recommended that special care shall be taken by the owner during and after the construction is complete and during the run period of the building.

GEOMINES ENGINEERS (P) LTD., GMEPL Chennai

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CONTENTS

	SEC. NO.		PAGE NO.
		REPORT COVER PAGE	I
		CONTENTS	I
CHAPTER-1		**INTRODUCTION**	
	1.0	Preamble	1
	1.1	Scope of Work	1
	1.2	Structure of the Report	1
CHAPTER-2		**INVESTIGATION METHODOLOGY & TEST RESULTS**	
	2.0	Field Testing	2
	2.1	Preamble	2
	2.2	Equipment Used and Method of Drilling	2
	2.2.1	Equipment Used	2
	2.2.2	Method of Drilling	2
	2.3	In-situ Strength Tests	2
	2.3.1	Standard Penetration Tests	2
	2.4	Collection of Samples	2
	2.4.1	Disturbed Soil Samples	2
	2.4.2	Ground Water	3
	2.5	Summary of Field Work	3
	2.6	Laboratory Testing	3
	2.6.1	Coarse Grained Soil Samples	3
	2.6.1.1	Grain Size Analysis Tests	3
	2.6.2	Fine Grained Soil Samples	3
	2.6.2.1	Index Property & Free Swell Tests	3
	2.6.3	Chemical Analysis Tests	3
	2.6.3.1	Water Samples	3
FIGURES	2.0	Site Plan representing the locations of Field investigation points	4
	2.1	Soil Profile at BH-01 Location	5-6
	2.2	Soil Profile at BH-02 Location	7-8
TABLES	2.1	Laboratory Test Result on the Soil Samples collected from BH-01 Location	9
	2.2	Laboratory Test Result on the Soil Samples collected from BH-02 Location	10
	2.3	Chemical Analysis Test Result on the Water Samples collected from borehole Locations	11
CHAPTER-3		**SUB-SURFACE STRATIFICATION**	
	3.0	Preamble	12
	3.1	Sub surface Stratification	12
	3.1.1	Soil Profile at BH-01 Location	12-13
	3.1.2	Soil Profile at BH-02 Location	13-15

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-4		**FOUNDATION SYSTEM**	
	4.0	Preamble	16
	4.1	Bearing Strata Characteristics	16
	4.2	Foundation System	16
	4.2.1	Deep Foundation System-21.00m Long Bored Cast-in-Situ Friction Piles	16-17
CHAPTER-5		**RECOMMENDATIONS**	18
ANNEXURE		Design of Deep Foundation System (Ref. BH-01)	19-21
		Sample Computations for Lateral Load Carrying Capacity of Piles	22-24

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-1

INTRODUCTION

1.0 Preamble

Sreerosh Properties Pvt. Ltd., Chennai proposed to construct a **Residential Building (Stilt+05) at Door no 7(91), Gill Nagar 3rd street, Gill Nagar, Choolaimedu, Chennai-600094.**

For the purpose of designing the foundations, the responsibility of carrying out suitable soil investigations was entrusted to **M/s. Geo Mines ENGINEERS Pvt. Ltd., Chennai.**

This report contains the field and laboratory test results along with Design computations and recommendations for suitable foundation systems.

1.1 Scope of Work

- Sinking Two Standard Soil investigation bore holes of 150mm diameter up to a depth of 23.00m below existing ground level as directed by the engineer-in-charge.
- Conducting Standard Penetration Test (SPT) at regular depth intervals.
- Collection of Split Spoon Samples or Disturbed Soil Samples
- Collection of water samples from each bore hole.
- Conducting relevant laboratory test results.

1.2 Structure of the Report

- Contents
- Introduction
- Investigation Methodology & Test Results
- Figures & Tables
- Sub-Surface Stratification
- Foundation Systems
- Recommendations
- Annexure (Design Computations)

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-2

INVESTIGATION METHODOLOGY & TEST RESULTS

2.0 Field Testing:

2.1 Preamble:

Two standard soil investigation boreholes were put. The equipment used and the methodology adopted to carry out the fieldwork is described below.

2.2 Equipment Used and Method of Drilling:

2.2.1 Equipment Used

The equipment used for performing the drilling operations was a Calyx Rotary Drill Rig with direct mud circulation technique. The drill mud used was made out of Sodium Bentonite.

2.2.2 Methodology of drilling

In the soil strata, the drilling operations were carried out using special drill bits and cutters coupled with direct mud circulation.

2.3 In-Situ Strength Tests:

2.3.1 Standard Penetration Test:

Standard penetration tests were conducted at the borehole locations, in accordance with IS: 2131. The tests were conducted at every change of strata up to the depth of termination of the borehole as directed by the engineer-in-charge.

2.4. Collection of Samples:

2.4.1 Disturbed Soil Samples

The SPT-samples collected were used as disturbed soil samples. These samples were used for visual and physical identification and for conducting laboratory classification tests as per I.S.1498-1970.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

2.4.2 Ground Water

For conducting suitable chemical tests, the ground water sample was collected from the respective borehole.

2.5 Summary of Field Work

The locations of the boreholes are shown in site plan given in Fig. 2.0. The soil profiles obtained at each location is shown in Figs. 2.1 & 2.2.

2.6 Laboratory Testing:

2.6.1 Coarse Grained Samples:

2.6.1.1 Grain size Analysis Tests:

On the coarse-grained soil samples, grain size distribution tests were conducted as per I.S.2720 (Part 4)-1985, to know the gradation characteristics and to classify them. These results are presented in Tables 2.1 & 2.2.

2.6.2 Fine Grained Samples:

2.6.2.1 Index Property – Free Swell Tests:

Atterberg Limits were carried out on fine grained soil samples to evaluate the limits of different consistency states. Generally Liquid limits, Plastic limits and Shrinkage Limits tests were conducted as per I.S.2720 (Part-5)-1985 and I.S.2720 (Part 6)-1972. On such type of soil strata encountered at the investigation locations, such tests were conducted and the test results are presented in Tables 2.1 & 2.2.

2.6.3 Chemical Analysis Tests:

2.6.3.1 Water Samples:

On representative water samples, chemical analysis tests were conducted to estimate pH, Chlorides and Sulphates. These results are presented in Table-2.3.

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

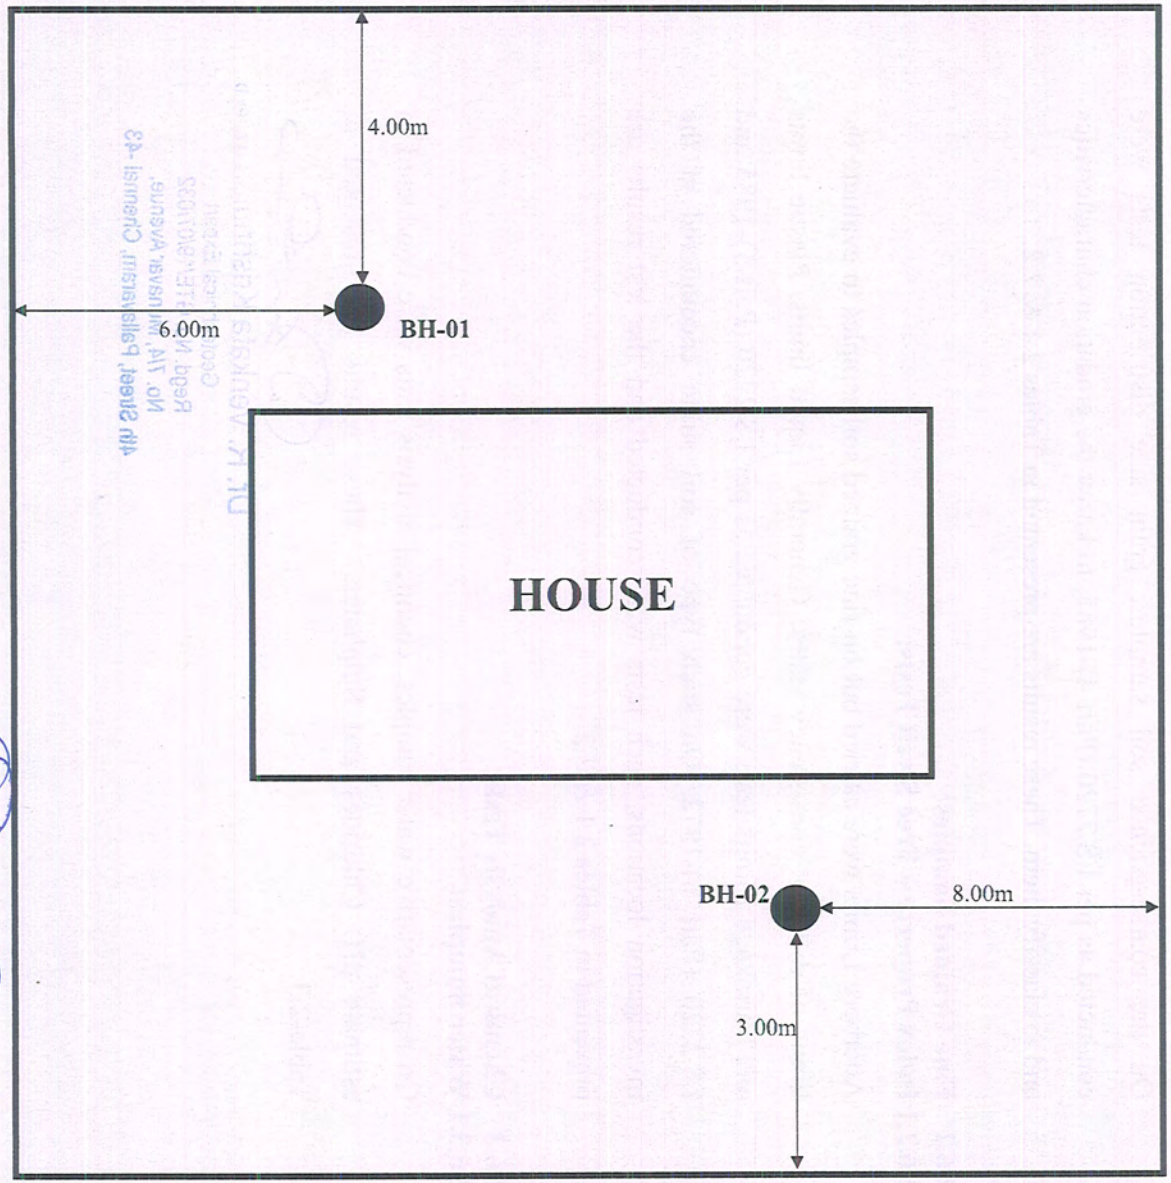


Fig. 2.0: Site Plan Representing the locations of Field Investigation Points

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43


Project : Proposed Construction of Residential Building (Stilt+05) at Door no 7(91), Gill Nagar 3rd street, Gill Nagar, Choolaimedu, Chennai-600094.

Location: BH-01

Started On : 09/04/2024; Ended On : 10/04/2024 G.W.T: 3.50m below existing ground level

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	Graphical Representation 0 1 2 3 4 5 6 7 8 9	Relative Density/Consistency	Type of Sample
			Brownish Stiff Silty Sandy Clay	1.50	3	4	5	9		Stiff	SS
2.00				2.50	3	4	4	8		Loose	SS
G.W.T				3.50	7	6	5	11		Loose	SS
			Greyish to Yellowish Loose Silty Clayey Fine Sand	4.50	5	6	6	12		Loose	SS
6.50				6.00	5	6	7	13		Loose	SS
			Greyish to Yellowish Medium Dense Silty Clayey Fine Sand	7.50	7	9	10	19		M.Dense	SS
8.00											
			Greyish Medium Dense Silty Clayey Fine Sand	9.00	8	13	14	27		M.Dense	SS
10.00				10.00	10	14	17	31		Dense	SS
			Greyish Dense Silty Clayey Fine Sand	12.00	10	16	18	34		Dense	SS
13.50											
14.00			Slate Rock	14.00	16	23	29	52		Hard	SS
			Greyish to Yellowish Hard Silty Sand Clay	16.00	23	36	10cms Penetration for 50 Blows			Hard	SS

Dr. R. Venkata [illegible] Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

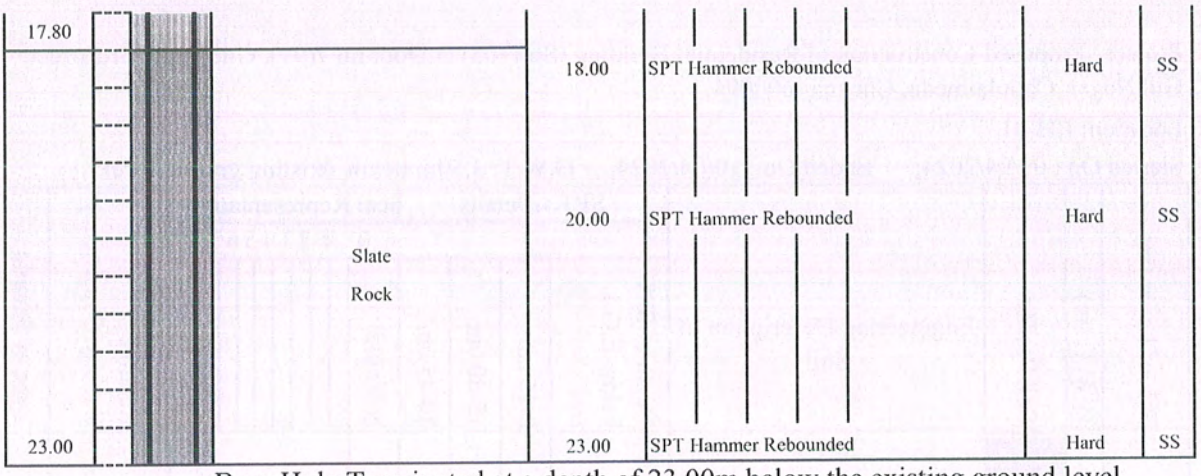

Bore Hole Terminated at a depth of 23.00m below the existing ground level

Fig. 2.1 Soil Profile at BH-01 Location

Dr. R. Venkata Krishnaiah M.E., Ph.D
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43


Project : Proposed Construction of Residential Building (Stilt+05) at Door no 7(91), Gill Nagar 3rd street, Gill Nagar, Choolaimedu, Chennai-600094.

Location: BH-02

Started On : 10/04/2024; Ended On : 11/04/2024 G.W.T: 3.50m below existing ground level

R.L of Layer (m)	G.W.T. (m)	Soil Profile	Engineering Description of Soil	SPT - Details: Depth of SPT below E.G.L (m)	0-15 cm	15-30 cm	30-45 cm	N-Value	ical Representation of 0 1 2 3 4 5 6 7 8 9	Relative Density/Consistency	Type of Sample
			Brownish Very Stiff Silty Clay	1.50	8	10	7	17		V.Stiff	SS
2.50				2.50	7	7	7	14		Loose	SS
3.50	↓		Greyish to Yellowish Loose Silty Clayey Fine Sand	3.50	6	7	9	16		M.Dense	SS
4.50			Greyish to Yellowish Medium Dense Silty Clayey Fine Sand	4.50	6	6	7	13		Loose	SS
6.50			Greyish to Yellowish Loose Silty Clayey Fine Sand	6.00	5	7	8	15		Loose	SS
8.00			Greyish to Yellowish Medium Dense Silty Clayey Fine Sand	7.50	8	9	11	20		M.Dense	SS
				9.00	10	14	15	29		M.Dense	SS
				10.00	8	10	15	25		M.Dense	SS
13.50			Greyish Medium Dense Silty Clayey Fine Sand	12.00	11	14	15	29		M.Dense	SS
14.50			Slate Rock	14.00	SPT Hammer Rebounded					Hard	SS
17.00			Greyish to Yellowish Hard Silty Sand Clay	16.00	18	26	29	55		Hard	SS

Dr. K. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

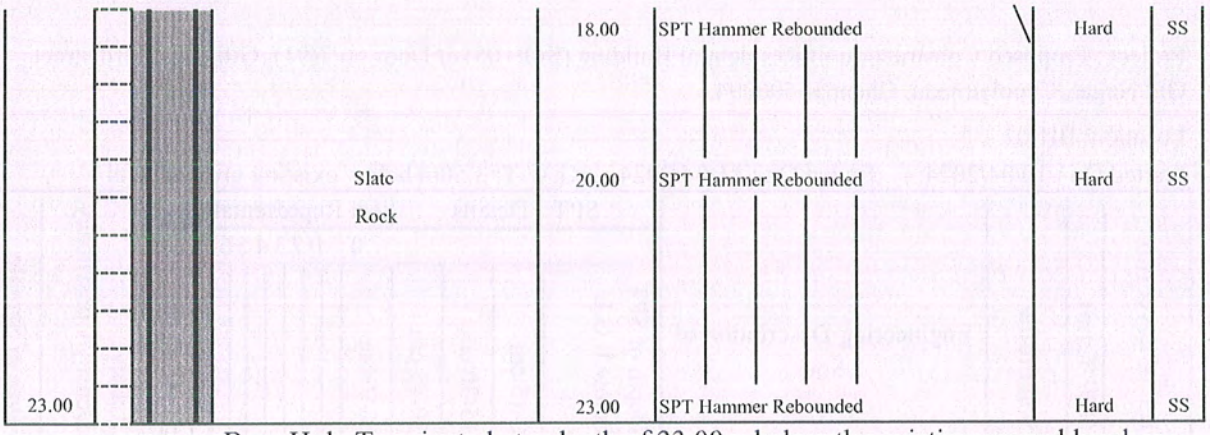

Bore Hole Terminated at a depth of 23.00m below the existing ground level

Fig. 2.2 Soil Profile at BH-02 Location

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Table 2.1: Laboratory Test Results on the Soil Samples Collected from BH-01

Depth of Sample below E.G.L. (m)	SPT of Sample	Type of Sample	Engineering Description of Soil	NMC(%)	Natural Density (g/cc)	Clay					Relative Density/ Consistency	Sieve Analysis						IS-Classification
						LL (%)	PL (%)	PI	I_c	FS		Gravel (%)	Coarse (%)	Medium (%)	Fine (%)	Silt (%)	Clay (%)	
0.00 to 2.00	9	SS	Silty Sandy Clay	34	1.7	53	28	25	0.76	13	Stiff	0	0	0	8	12	80	CH
2.00 to 6.50	11	SS	Silty Clayey Fine Sand	-	1.5	-	-	-	-	-	Loose	0	0	0	73	11	16	SM
6.50 to 8.00	19	SS	Silty Clayey Fine Sand	-	1.6	-	-	-	-	-	M.Dense	0	0	0	78	9	13	SM
8.00 to 10.00	27	SS	Silty Clayey Fine Sand	-	1.8	-	-	-	-	-	M.Dense	0	0	0	80	9	11	SM
10.00 to 13.50	32	SS	Silty Clayey Fine Sand	-	1.9	-	-	-	-	-	Dense	0	0	0	83	7	10	SM
13.50 to 14.00	-	DS	Slate Rock	16	2.0	35	26	9	2.11	-	Hard	0	0	0	0	23	77	CL
14.00 to 17.80	76	SS	Silty Sandy Clay	21	2.0	43	31	12	1.83	-	Hard	0	0	0	0	26	74	CI
17.80 to 23.00	>100	SS	Slate Rock	14	2.0	33	25	8	2.38	-	Hard	0	0	0	0	28	72	CL

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Table 2.2: Laboratory Test Results on the Soil Samples Collected from BH-02

Depth of Sample below E.G.L. (m)	SPT of Sample	Type of Sample	Engineering Description of Soil	NMC(%)	Natural Density (g/cc)	Clay					Relative Density/ Consistency	Sieve Analysis						IS-Classification
						LL (%)	PL (%)	PI	I_c	FS		Gravel (%)	Coarse (%)	Medium (%)	Fine (%)	Silt (%)	Clay (%)	
0.00 to 2.50	17	SS	Silty Clay	28	1.7	47	31	16	1.19	7	V.Stiff	0	0	0	0	20	80	CI
2.50 to 3.50	14	SS	Silty Clayey Fine Sand	-	1.5	-	-	-	-	-	Loose	0	0	0	74	12	14	SM
3.50 to 4.50	16	SS	Silty Clayey Fine Sand	-	1.6	-	-	-	-	-	M.Dense	0	0	0	78	8	14	SM
4.50 to 6.50	14	SS	Silty Clayey Fine Sand	-	1.5	-	-	-	-	-	Loose	0	0	0	74	11	15	SM
6.50 to 8.00	20	SS	Silty Clayey Fine Sand	-	1.8	-	-	-	-	-	M.Dense	0	0	0	78	9	13	SM
8.00 to 13.50	27	SS	Silty Clayey Fine Sand	-	1.9	-	-	-	-	-	M.Dense	0	0	0	80	10	10	SM
13.50 to 14.50	>100	SS	Slate Rock	16	2.0	34	26	8	2.25	-	Hard	0	0	0	0	25	75	CL
14.50 to 17.00	55	SS	Silty Sandy Clay	22	2.0	41	31	10	1.90	-	Hard	0	0	0	0	23	77	CI
17.00 to 23.00	>100	SS	Slate Rock	14	2.0	33	26	7	2.71	-	Hard	0	0	0	0	26	74	CL

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Table 2.3: Chemical Analysis Results conducted on Water Samples collected from BH-01 & BH-02

Location	Depth of Sample below E.G.L. (m)	pH	Chlorides (ppm)	Sulphates (ppm)
BH-01	4.50	6.79	291.48	177.48
BH-02	4.50	6.80	284.81	172.86

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-3

SUB-SURFACE STRATIFICATION

3.0 Preamble

The sub surface stratification at borehole locations, with respect to foundation/geotechnical engineering application are derived based on the visual identification, laboratory classification tests and field in-situ strength tests. Further, the strength parameters are estimated based on the in-situ strength test results as per the following correlation.

* **For Coarse Grained Samples, Ref. Fig.1, IS: 6403 to estimate Angle of Shearing Resistance.**
* **For Fine Grained Samples, Ref. Terzaghi & Peck, 1948, to estimate Unconfined Compressive Strength.**

3.1 Sub Surface Stratification:

3.1.1 Soil Profile at BH-01 Location

(At BH-01 Location, as presented in Site plan)

* **Layer-1 (from E.G.L to 2.00m depth)**

Type of Strata	Silty Sandy Clay
Colour	Brownish
Thickness of Layer	2.00m
SPT of the layer	09
Consistency	Stiff
Un-drained Cohesion, Cu	60.00kPa

* **Layer-2 (from 2.00m to 6.50m depth)**

Type of Strata	Silty Clayey Fine Sand
Colour	Greyish to Yellowish
Thickness of Layer	4.50m
SPT of the layer	11
Relative Density	Loose
Angle of Shearing Resistance, ϕ	30.30^0

* **Layer-3 (from 6.50m to 8.00m depth)**

Type of Strata	Silty Clayey Fine Sand
Colour	Greyish to Yellowish
Thickness of Layer	1.50m
SPT of the layer	19
Relative Density	Medium Dense
Angle of Shearing Resistance, ϕ	32.70^0

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

* **Layer-4 (from 8.00m to 10.00m depth)**

Type of Strata	Silty Clayey Fine Sand
Colour	Greyish
Thickness of Layer	2.00m
SPT of the layer	27
Relative Density	Medium Dense
Angle of Shearing Resistance, ϕ	35.10^0

* **Layer-5 (from 10.00m to 13.50m depth)**

Type of Strata	Silty Clayey Fine Sand
Colour	Greyish
Thickness of Layer	3.50m
SPT of the layer	32
Relative Density	Dense
Angle of Shearing Resistance, ϕ	36.55^0

* **Layer-6 (from 13.50m to 14.00m depth)**

Type of Strata	Slate Rock
Colour	-
Thickness of Layer	0.50m
SPT of the layer	-
Consistency	Hard
Un-drained Cohesion, Cu	-

* **Layer-7 (from 14.00m to 17.80m depth)**

Type of Strata	Silty Sandy Clay
Colour	Greyish to Yellowish
Thickness of Layer	3.80m
SPT of the layer	76
Consistency	Hard
Un-drained Cohesion, Cu	506.66kPa

* **Layer-8 (from 17.80m to 23.00m depth)**

Type of Strata	Slate Rock
Colour	-
Thickness of Layer	5.20m
SPT of the layer	>100
Consistency	Hard
Un-drained Cohesion, Cu	666.66kPa

Ground Water

Ground water table was encountered at a depth of 3.50m below the existing ground level during the second week of April 2024.

3.1.2 Soil Profile at BH-02 Location
(At BH-02 Location, as presented in Site plan)

* **Layer-1 (from E.G.L to 2.50m depth)**

Type of Strata	Silty Clay
Colour	Brownish
Thickness of Layer	2.50m
SPT of the layer	17
Consistency	Very Stiff
Un-drained Cohesion, Cu	113.33kPa

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

*	**Layer-2 (from 2.50m to 3.50m depth)**	
	Type of Strata	Silty Clayey Fine Sand
	Colour	Greyish to Yellowish
	Thickness of Layer	1.00m
	SPT of the layer	14
	Relative Density	Loose
	Angle of Shearing Resistance, ϕ	31.20^0
*	**Layer-3 (from 3.50m to 4.50m depth)**	
	Type of Strata	Silty Clayey Fine Sand
	Colour	Greyish to Yellowish
	Thickness of Layer	1.00m
	SPT of the layer	16
	Relative Density	Medium Dense
	Angle of Shearing Resistance, ϕ	31.80^0
*	**Layer-4 (from 4.50m to 6.50m depth)**	
	Type of Strata	Silty Clayey Fine Sand
	Colour	Greyish to Yellowish
	Thickness of Layer	2.00m
	SPT of the layer	14
	Relative Density	Loose
	Angle of Shearing Resistance, ϕ	31.20^0
*	**Layer-5 (from 6.50m to 8.00m depth)**	
	Type of Strata	Silty Clayey Fine Sand
	Colour	Greyish to Yellowish
	Thickness of Layer	1.50m
	SPT of the layer	20
	Relative Density	Medium Dense
	Angle of Shearing Resistance, ϕ	33.00^0
*	**Layer-6 (from 8.00m to 13.50m depth)**	
	Type of Strata	Silty Clayey Fine Sand
	Colour	Greyish
	Thickness of Layer	5.50m
	SPT of the layer	27
	Relative Density	Medium Dense
	Angle of Shearing Resistance, ϕ	35.10^0
*	**Layer-7 (from 13.50m to 14.50m depth)**	
	Type of Strata	Slate Rock
	Colour	-
	Thickness of Layer	1.00m
	SPT of the layer	>100
	Consistency	Hard
	Un-drained Cohesion, Cu	666.66kPa
*	**Layer-8 (from 14.50m to 17.00m depth)**	
	Type of Strata	Silty Sandy Clay
	Colour	Greyish to Yellowish
	Thickness of Layer	2.50m
	SPT of the layer	55
	Consistency	Hard
	Un-drained Cohesion, Cu	366.66kPa

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

* **Layer-9 (from 17.00m to 23.00m depth)**

Type of Strata	Slate Rock
Colour	-
Thickness of Layer	6.00m
SPT of the layer	>100
Consistency	Hard
Un-drained Cohesion, Cu	666.66kPa

Ground Water

Ground water table was encountered at a depth of 3.50m below the existing ground level during the second week of April 2024.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-4

FOUNDATION SYSTEM

4.0 Preamble

The foundation system design is an interface between super structure and the sub soil bearing strata characteristics. A sound foundation system should be safe against bearing strata shear response under the super structure load intensity. Similarly, the stability of the foundation system is governed by the bearing strata deformation response under the super structure load intensity. In addition, as a combined system of super structure and foundation, the overall stability is also governed by the super structure arrangement.

Considering the above aspects of foundation design, the suitable type of foundation system with respect to the sub soil conditions encountered at the borehole locations is presented in the subsequent sections.

4.1 Bearing Strata Characteristics

From field investigations, it can be observed that the sub-soil strata encountered at shallow depths are weak from both shear strength characteristics and deformation considerations and hence cannot be considered as bearing strata for proposed impending loads from structure.

However, the sub-soil strata encountered up to the depth of investigations can offer good frictional resistance against a suitably designed structural member or element if being cast or driven in such soils.

Considering the above, suitable foundation system is presented below.

4.2 Foundation System

4.2.1 Deep Foundation System-21.00m Long Bored Cast-in-Situ Friction Piles

Considering the weak shear strength characteristics of sub-soil strata encountered at shallow depths, deep foundation system consisting of 21.00m long bored cast-in-situ Friction Piles can be adopted.

Piles shall be drilled through DMC (direct mud circulation) technique.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

For four different diameters, the safe load carrying capacities of 21.00m long bored cast-in-situ Friction Piles are computed and presented below which can be adopted for foundation design purposes.

S. No	Type of Installation of Pile	Type of Pile Head Group	Length of Pile below Existing Ground Level (m)	Diameter of Pile (mm)	Safe Load Carrying Capacity (MT)	Safe Pull Out Capacity (MT)
1	Bored Cast-in-Situ	Fixed	21.00	500	90	90
2				550	100	100
3				600	110	110
4				650	120	120

The computations of safe load carrying capacity for 500mm diameter and 21.00m long bored cast-in-situ Friction Pile are annexed to this report.

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-5

CONCLUSIONS & RECOMMENDATIONS

1. Deep Foundation system presented in Clause 4.2.1, Chapter-IV can be adopted for foundation design purposes.
2. Suitable pile load tests (as per I.S: 2911, part-IV) shall be performed to confirm the presented **theoretical** safe load carrying capacities and arrive at the **allowable** load carrying capacity of piles under considerations. (**Note**)
3. Pile cap can be located over 0.30m thick well compacted ground replaced soil surface. Ground replacement can be carried out with CNS (cohesive non-swelling) soil.
4. Piles shall be grouped according to the column design load requirements.
5. Allowable load carrying capacities of piles shall be limited to their structural capacities.

General

6. **CNS can be well graded and non-plastic earth like quarry dust or clean river sand or sand: gravels mix (1:2) or fly-ash that shall be well compacted at site to achieve more than 95% of laboratory maximum dry density at optimum moisture content.**
7. As the chlorides and sulphates present in the collected water samples are within the permissible limits, no special steel or cement is recommended to be used for **open** foundation construction purposes only (if proposed or adopted).
8. **It is recommended to extract the water samples at different intervals up to higher depths from an open-well/dug-well and tested for the chemical parameters as per the required usage or purpose and also to understand the construction material to be used for deep foundation purposes.**

For Geo Mines Engineers Pvt. Ltd.

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Director

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

CHAPTER-5

CONCLUSIONS & RECOMMENDATIONS

1. Deep Foundation system presented in Clause 4.2.1, Chapter-IV can be adopted for foundation design purposes.
2. Suitable pile load tests (as per I.S: 2911, part-IV) shall be performed to confirm the presented **theoretical** safe load carrying capacities and arrive at the **allowable** load carrying capacity of piles under considerations. (**Note**)
3. Pile cap can be located over 0.30m thick well compacted ground replaced soil surface. Ground replacement can be carried out with CNS (cohesive non-swelling) soil.
4. Piles shall be grouped according to the column design load requirements.
5. Allowable load carrying capacities of piles shall be limited to their structural capacities.

General

6. **CNS can be well graded and non-plastic earth like quarry dust or clean river sand or sand: gravels mix (1:2) or fly-ash that shall be well compacted at site to achieve more than 95% of laboratory maximum dry density at optimum moisture content.**
7. As the chlorides and sulphates present in the collected water samples are within the permissible limits, no special steel or cement is recommended to be used for **open** foundation construction purposes only (if proposed or adopted).
8. **It is recommended to extract the water samples at different intervals up to higher depths from an open-well/dug-well and tested for the chemical parameters as per the required usage or purpose and also to understand the construction material to be used for deep foundation purposes.**

For Geo Mines Engineers Pvt Ltd

Director

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

DESIGN OF PILE FOUNDATION (Ref. BH-01)

Refer, IS:2911(Part I/Sec 2)-1979, Reaffirmed 1997

1.0 Type of Installation of Pile — **Bored Cast in Situ**

1.1 Geometrical Data

Assumed Diameter of pile(D):	**500.0**	mm
Assumed R.L of E.G.L:	0.000	m
Length of pile below E.G.L.(l) :	**21.000**	m
R.L. of Bot. of Pile	-21.00	m

1.2 Design of Pile for Vertical Compression

1.2.1 Computation of Skin Resistance:

1.2.1.1 **Layer-I**

Type of Strata:	Silty Sandy Clay	
Average SPT of the strata,N:	9	
Bulk Density of the strata,γ:	17	kN/m^3
Undrained Cohesion, Cu:	60.00	kPa
R.L of top of Strata:	0.00	m
R.L of bottom of Strata:	-2.00	m
Average Thickness of Strata,I_c:	2.00	m
Effective overburden pressure over the top of strata,σ_{top}:	0.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	14.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	7.00	kN/m^2
Adhesion Factor, α:	0.40	
Skin Resistance of the pile,q_s:	75.40	kN
(q_s:α*Cu*pi()*d*Ic)		

1.2.1.2 **Layer-II**

Type of Strata:	Silty Clayey Fine Sand	
Average SPT of the strata,N:	11	
Bulk Density of the strata,γ:	15	kN/m^3
Angle of Shearing Resistance,ϕ:	30.3	Deg.
R.L of top of Strata:	-2.00	m
R.L of bottom of Strata:	-6.50	m
Average Thickness of Strata,I_c:	4.50	m
Effective overburden pressure over the top of strata,σ_{top}:	14.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	36.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	25.25	kN/m^2
Coeff. Of Earth Pressure, k:	1.00	
Skin Resistance of the pile,q_s:	104.30	kN
(q_s:σ*k*tanϕ*pi()*d*Ic)		

1.2.1.3 **Layer-III**

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Type of Strata:	Silty Clayey Fine Sand	
Average SPT of the strata,N:	19	
Bulk Density of the strata,γ:	16	kN/m^3
Angle of Shearing Resistance,ϕ:	32.7	Deg.
R.L of top of Strata:	-6.50	m
R.L of bottom of Strata:	-8.00	m
Average Thickness of Strata,I_c:	1.50	m
Effective overburden pressure over the top of strata,σ_{top}:	36.50	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	45.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	41.00	kN/m^2
Coeff. Of Earth Pressure, k:	1.50	
Skin Resistance of the pile,q_s:	93.03	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

1.2.1.4 Layer-IV

Type of Strata:	Silty Clayey Fine Sand	
Average SPT of the strata,N:	27	
Bulk Density of the strata,γ:	18	kN/m^3
Angle of Shearing Resistance,ϕ:	35.1	Deg.
R.L of top of Strata:	-8.00	m
R.L of bottom of Strata:	-10.00	m
Average Thickness of Strata,I_c:	2.00	m
Effective overburden pressure over the top of strata,σ_{top}:	45.50	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	61.50	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	53.50	kN/m^2
Coeff. Of Earth Pressure, k:	1.50	
Skin Resistance of the pile,q_s:	177.19	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

1.2.1.5 Layer-V

Type of Strata:	Silty Clayey Fine Sand	
Average SPT of the strata,N:	32	
Bulk Density of the strata,γ:	19	kN/m^3
Angle of Shearing Resistance,ϕ:	36.55	Deg.
R.L of top of Strata:	-10.00	m
R.L of bottom of Strata:	-13.50	m
Average Thickness of Strata,I_c:	3.50	m
Effective overburden pressure over the top of strata,σ_{top}:	61.50	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	93.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	77.25	kN/m^2
Coeff. Of Earth Pressure, k:	2.00	
Skin Resistance of the pile,q_s:	629.68	kN

(q_s:σ*k*tanϕ*pi()*d*Ic)

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

1.2.1.6 **Layer-VII**

Type of Strata:	Silty Sandy Clay	
Average SPT of the strata,N:	60	
Bulk Density of the strata,γ:	20	kN/m^3
Undrained Cohesion, Cu:	400.00	kPa
R.L of top of Strata:	-13.50	m
R.L of bottom of Strata:	-17.80	m
Average Thickness of Strata,I_c:	4.30	m
Effective overburden pressure over the top of strata,σ_{top}:	93.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	136.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	114.50	kN/m^2
Adhesion Factor, α:	0.40	
Skin Resistance of the pile,q_s:	1080.71	kN
(q_s:α*Cu*pi()*d*Ic)		

1.2.1.7 **Layer-VIII**

Type of Strata:	Slate Rock	
Average SPT of the strata,N:	60	
Bulk Density of the strata,γ:	20	kN/m^3
Undrained Cohesion, Cu:	400.00	kPa
R.L of top of Strata:	-17.80	m
R.L of bottom of Strata:	-19.00	m
Average Thickness of Strata,I_c:	1.20	m
Effective overburden pressure over the top of strata,σ_{top}:	136.00	kN/m^2
Effective overburden pressure over the bottom of strata,σ_{bottom}:	148.00	kN/m^2
Effective overburden pressure at the middle of the strata,σ_{middle}:	142.00	kN/m^2
Adhesion Factor, α:	0.40	
Skin Resistance of the pile,q_s:	301.59	kN
(q_s:α*Cu*pi()*d*Ic)		

Ultimate Skin Resistance,q_s: 2461.89 kN

1.2.2 Computation of End Bearing Resistance:

Ultimate End Bearing Resistance (Qp) Neglected for Friction Pile

1.3.0 **Ultimate Load Carrying Capacity (Qu=Qs+Q_p)**	**2461.9**	**kN**
Safe Load Carrying Capacity (Qsafe =Qu/2.50)	**984.8**	**kN**
However, limit Q_{safe} to the structural capacity of pile:	**90.00**	**MT**

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Depth of fixity of Pile

Length of Pile

L_1 = 0 cm

[since the pile cast at ground level with fixed head]

Characteristic strength of Concrete

f_{ck} = 30 N/mm^2

Diameter of Pile

D = 50 cm

Modulas of Elasticity of Concrete (E)

$5000 \times \sqrt{f_{ck}} = 5000 \times \sqrt{30}$ N/mm^2

[As per IS 456 :2000 pg. no : 16]

= 273861.28 Kg/cm^2

Moment of Inertia of Pile (I)

$\frac{\pi \times D^4}{64} = \frac{3.14 \times 50^4}{64}$ cm^4

= 306640.6 cm^4

K_2 (constant) = 48.300 Kg/cm^2

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B]

R (constant) = $\sqrt[4]{\frac{(E \times I)}{K_2}}$

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2]

= 204.20 cm

Hence L_1 / R = $\frac{L_1}{R}$

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2]

= 0.0E+00

Dr. R. Venkata Krishnaiah M.E., Ph.D.
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

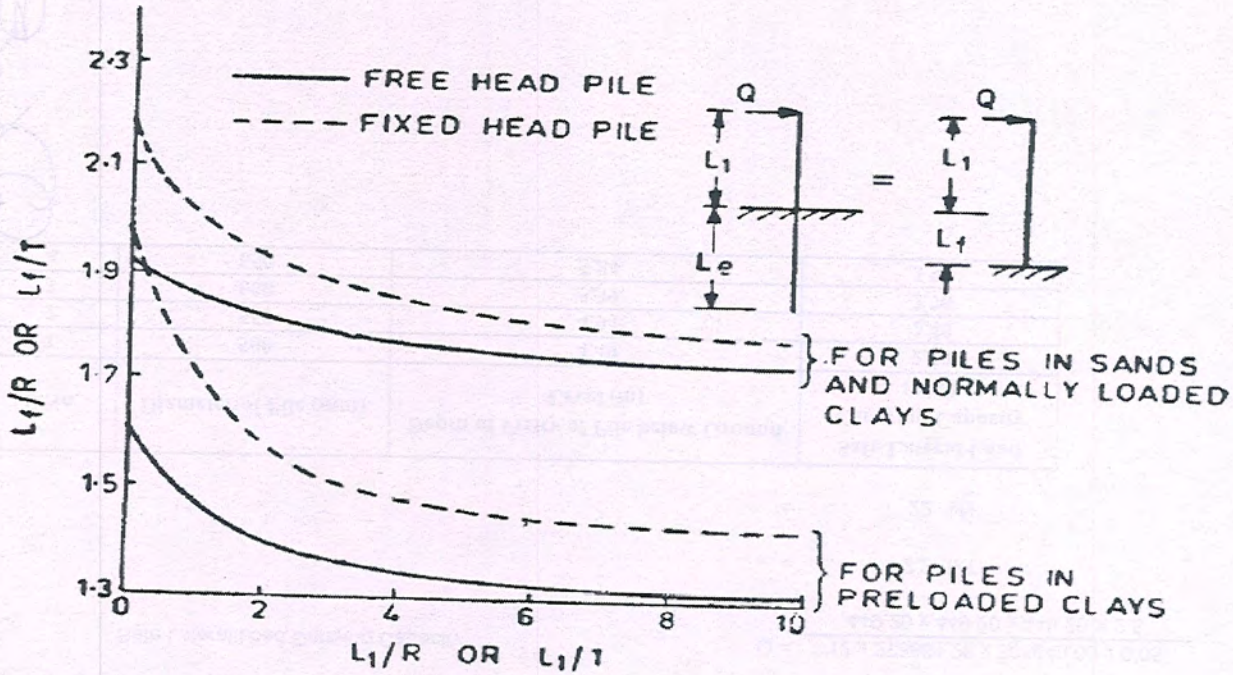


FIG. 2 DETERMINATION OF DEPTH FIXITY

For fixed head pile

$$\frac{L_1}{R} = 2.2$$

[As per IS : 2911 (Part 1 / Sec 1) - appendix-B, Cl.5.5.2 fig 2]

Length of fixity

L_f = 449.24 cm [As per IS : 2911 (Part 1 / Sec 1) -
= 4.49 m appendix-B, Cl.5.5.2]

Embedded Length

Le > 4 x R [As per IS : 2911 (Part 1 / Sec 1) -
> 8.2 m appendix-B, Cl.5.5.2]

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43

Calculation of Lateral capacity of pile

(From IS:2911, Part 1 / Sec. 1, Cl.5.5.2 - Appendix A)

$$\text{Lateral capacity , } Q = \frac{12\,E\,I\,Y}{(L_1 + L_f)^3}$$ for Fixed Head Pile

Where ,

Y = Lateral deflection of pile = 5 mm (As per IS2911, part1 / sec.1)

Modulas of Elasticity of Concrete (E) = 273861.28 Kg/cm2

Moment of Inertia of Pile (I) = 306640.6 cm4

L1 + Lf = 0 + 449.20
= 449.2 cm
= 4.49 m

Safe Lateral Load Carrying Capacity

$$Q = \frac{12 \times 273861.28 \times 306640.60 \times 0.05}{449.20 \times 449.20 \times 449.20 \times 2.5}$$

= 2.2 MT

= 22 kN

S.No	Diameter of Pile (mm)	Depth of Fixity of Pile below Ground Level (m)	Safe Lateral Load Carrying Capacity (MT)
1	500	4.49	2.20
2	550	4.94	2.40
3	600	5.39	2.70
4	650	5.84	2.90

Dr. R. Venkata Krishnaiah M.E., Ph.D.,
Geotechnical Expert
Regd. No. GTE/19/07/032
No. 7/4, Munavar Avenue,
4th Street, Pallavaram, Chennai -43



our services doesn't just end there

Buying & Selling Services

Property Buying Assistance, Property Selling Support, Market Price Analysis, Owner Outreach and Negotiation.

Legal & Documentation Services

Certified EC, Patta, legal opinions, property verification, due diligence, litigation solutions, and legal heir certificates.

Property Development & Approvals

Building plan approvals, construction, layout and sub-division approvals, zone conversion, and occupancy certification.

NRI & Investment Services

Escrow Services, Rentals, Litigation Solutions, Property Valuation and Property Management

Compliance & Special Services

Demolition, Vaasthu checks, regularization of unauthorized buildings, and office space solutions.



empowering your real estate decisions with smart tools

Property Valuation & Cost Estimation

Guideline Value, Apartment Composite Value, Stamp Duty & Registration Fees Calculator, Building Value Calculator, Capital Gains Calculator, Area Unit Converter, Length Unit Converter

Ownership, Compliance & Legal Verification

Encumbrance Certificate (EC) Search, Find Your SRO, Temple Property Check, WAQF Property Check, View Patta/Chitta, View FMB, Patta Analyzer, EC Analyzer

Zoning & Land Use Analysis

Land Use Zone Finder, CRZ Zone Check, Aquifer Zone Check, CBA Check, EWS Check, Road Width Check, Proposed Road Widening Check, FSI Calculator

Property Documentation & Workflow Tools

Forms & Templates, Document Generator, Document Translation, Dictionary

Vastu & Property Management Tools

Home Vastu Shastra, Plot Vastu Shastra, Property Management

Verified RealEstate™

We're honored to be part of your real estate journey

3/350/2 Mettukuppam,
OMR Thoraipakkam,
Chennai, India

hello@verified.realestate
+91 9996 12 9996
www.verified.realestate